



SERIE 882 M BP

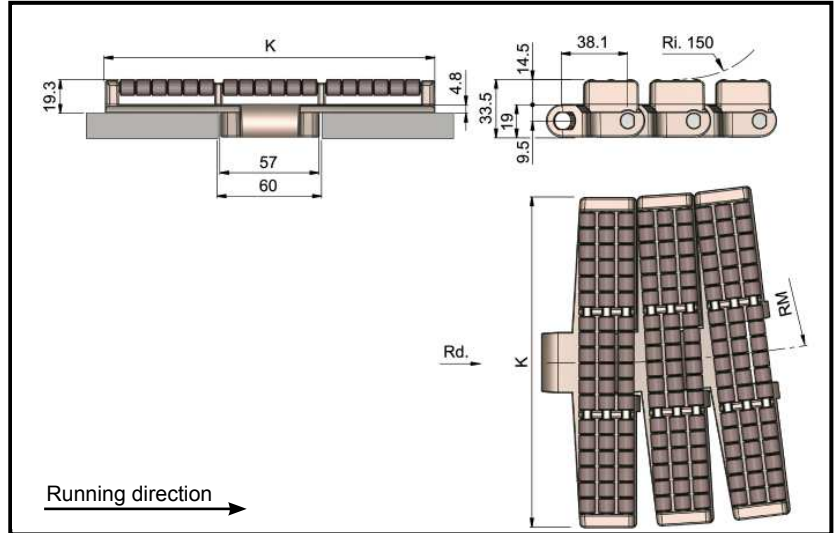

COD.	K		Kg/m	Open Surface	RM (mm)	*Ri (mm)
	mm	inch				
** 882M BP 075	190,5	7,50	5,03	0%	610	150
** 882M BP 100	254	10,0	6,10			
** 882M BP 120	304,8	12,0	6,92			

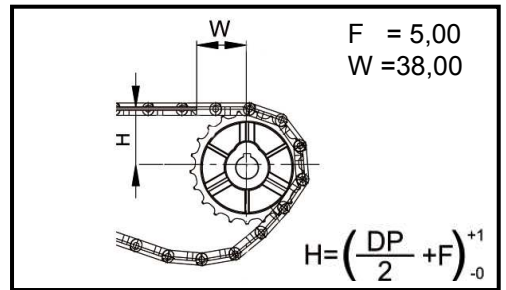


* Ri: Back-flex Radius


** Prefix	Chain material	Color	Ø Pin (mm)	Standard Pin Material	Minimum Temperature	Maximum Temp.		TT N	FDA Approval
						Dry enviroment	Wet enviroment		
LF ●	Acetal-LF	Brown	6,78	SS304	-40	+85	+70	3900	✓

Available types

Z	Ø De	Ø Dp
12	148,5	147,2

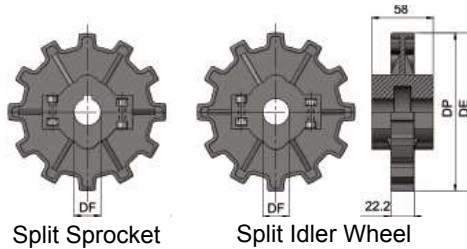

Z	Ø De	Ø Dp
9	112,5	111,4
10	124,9	123,4
11	136,4	135,2
12	148,5	147,2

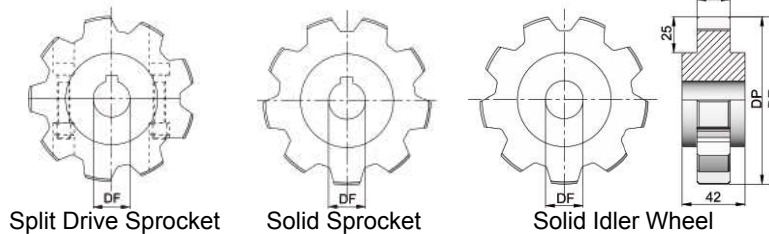

Remarks

- Standard packaging 1,52m 5ft.
- ● Made to order