

# Belts for the Wood Panel Board Industry













## Understanding your business

# Solid industry knowledge and experience


Within the Panel Board Industry, Ammeraal Beltech has been setting the standard for years with consistent high quality products and market specific features.

Modern high performance wood processing involves production of large volumes of particle board, MDF, HDF, OSB and plywood. Leading OEMs and end users choose Ammeraal Beltech belting solutions for reliable and safe processing.













Medium & High-Density Fiberboard (MDF and HDF)

Particle Board (PB)

Oriented Strand Board (OSB)





- Materials in gas or dust form can become flammable or combustible even if they are normally not, which may create a potentially explosive environment.
- Equipment in these environments can only be used safely if complying with the ATEX Equipment Directive.
- Ask the Ammeraal Beltech experts for the current ATEX qualified belt range suitable to be used in most common potentially explosive zones.

Find out more at www.ammeraalbeltech.com



### A trusted partner in the wood industry

Ammeraal Beltech partners with its customers, OEMs and End Users alike, to provide conveyor and process belting solutions that can improve product quality, reduce maintenance times and lower manufacturing costs.

### Innovative solutions to meet customer challenges

Industry challenges		Ammeraal Beltech Solutions
Prevention of antistatic loading	->	Antistatic belts
Potentially explosive environment	->	ATEX certified belts
Minimum downtime	->	QuickSplice and ZipLink® belts
Reliable operation	->	Seamless endless woven belts
Chemicals	->	Linatex PU coated belts
Wear resistance	->	Polyurethane belt covers
Abrasion resistance	->	RAPPLON® power transmission belts
High efficiency	$\rightarrow$	uni Modular Belts

We offer a wide range of belting products. By choosing Ammeraal Beltech, you can not only reduce your supplier base, you will also have access to our worldwide network of industry and product specialists.



local stock quick belt replacement short delivery time 24/7 service






## Chipboard Panel Production

Ammeraal Beltech belting products reduce production losses.

- High durability, reliable and abrasion resistance belts keep maintenance and belt wear to a minimum.
- Wear resistant cover materials give extremely good resistance against wood pulp, promoting extended belt life.
- Our conveyor belts, endless woven belts and plastic uni Modular Belts have been specially developed to full specific production requirements.



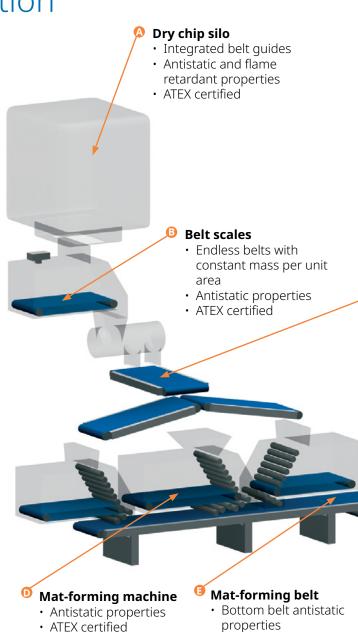


· ATEX certified

surface

· Non-stick easy to clean

 Suitable for high load and long conveyors, no re-tensioning needed



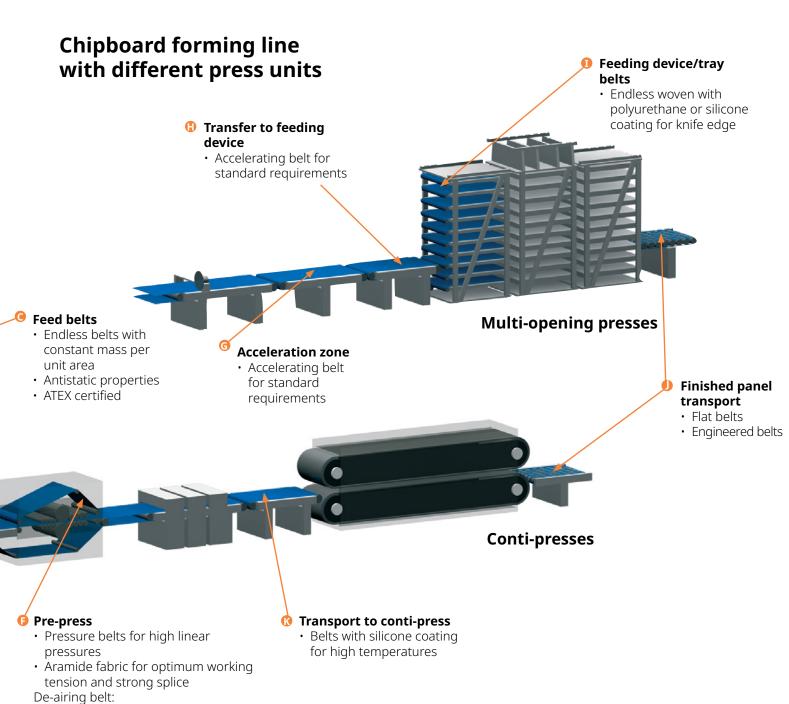

Antistatic propertiesATEX certified



## Ropanyl Forming Belts

Our Ropanyl forming belts are made of high quality fabric with a thin PU coating to provide reliable processing of wood fibres and chips.

#### **Main features**

- Longitudinally flexible; suitable for small diameter transfers (typically 25 mm at a 135 degrees turn)
- High force/elongation value; suitable for high loads and long conveyors, no re-tensioning needed
- Dimensionally stable; excellent tracking properties and lays perfectly flat
- Very good antistatic properties; no material accumulation due to build up of electronic charge
- Good abrasion and chemical resistance
- Excellent tracking properties; easy to clean
- Strong splice made with unique Maestro equipment

#### **Benefits**

- High performance
- Maintenance free
- · Long belt life & ATEX approved

### **Applications**

- Transfers & accelerating
- Board conveying & finishing
- Drying tunnel

Technical data	
Belt type	Ropanyl EM 20/1 00+03 white M2 AS/93Sh
Article code	514213
Belt thickness	1.8 mm
Weight	2.0 kg/m²
Force at 1% elongation	20 N/mm
Surface finish / hardness	fine matt finish / 93 Shore A
. Min. pulley diameter flexing / back flexing	20 / 80 mm
Temperature range	-20 to +80°C
Max. standard / production width	3000 / 3250 mm

Also available with low weight tolerance: 514667 Ropanyl EM 20/1 00+03 white M2 AS FG/93Sh LWT

Ropanyl is a brandname of Ammeraal Beltech

AS = antistatic



The effectiveness of our forming, transfer, accelerator

and Pre-Press Belts for Particle Board Production

is proven in many factories worldwide



### Ropanyl Pre-Press Belts

Ropanyl pre-press belts are made of aramide fabric with a highly qualified cover surface to provide maximum compressing and reliable distribution of compression.

### **Main features**

- · High force elongation value
- Good abrasion resistance and a homogeneous belt surface
- Excellent antistatic properties; no build-up of electronic charge
- Very good chemical resistance
- High pressure resistance; good distribution of compression
- Strong splice made with unique Maestro equipment

#### **Benefits**

- Excellent belt performance
- High production safety
- Maintenance free
- High quality produciton
- Long belt life
- ATEX approved

Technical data	
Belt type	Ropanyl EM/K 50/3 00+04 black M1 AS
Article code	000273
Belt thickness	3.7 mm
Weight	4.4 kg/m²
Force at 1% elongation	50 N/mm
Surface finish / hardness	fine matt finish / 92 Shore A
. Min. pulley diameter flexing / back flexing	250 / 300 mm
Temperature range	-20 to +90°C
Max. standard / production width	3200 / 3200 mm

Ropanyl is a brandname of Ammeraal Beltech

AS = antistatic

Available as spliced or truly endless version for high forces







### De-airing belt for Particle Board Production

Our de-airing belts are made of high quality polyester monofilament. Carefully selected bronze yarns woven in a maze structure assure the best electrostatic discharge and prevent particle build-up.

### **Main features**

- · Highly flexible
- Excellent tracking properties
- Balanced air- permeability
- Good abrasion and chemical resistance
- Easy to clean surface
- High pressure resistance; good distribution of compression
- Highly antistatic due to bronze maze

#### **Benefits**

- No particle build-up as result of electrostatic discharge
- High production safety
- High quality production
- ATEX approved


### **Applications**

- · Transfer and accelerating
- Board conveying
- Finishing
- Drying tunnel

# Belts can be equipped with 4 different splices

- Endless Woven
- Stainless steel fastener
- Plastic pin-seam
- · Finger splice prepared

Technical data		
Belt type	Conducto 2206	Conducto 5090
Article code	581951	581952
Belt thickness	1.95 mm	1.85 mm
Weight	1.55 kg/m <sup>2</sup>	1.55 kg/m <sup>2</sup>
Force at 1% elongation	14 N/mm	24 N/mm
Air permeability CFM 127 Pa	425 cfm	340 cfm
Min. pulley diameter flexing & back flexing	120 mm	120 mm
Temperature range	-40 to 110°C	-40 to 110°C
Max. standard / production width	3300 / 5000 mm	3300 / 5000 mm



**Double pinseam** 







### Infeed belt for Panel Board Production

Ammeraal Beltech infeed belts for conti-presses are based on the ZipLink® concept: the quickest splice method ever allows you to install a seamless belt without disassembling your machine, resulting in a major increase of your production time and cost savings.

Ammeraal Beltech infeed belts are made of high quality polyester mono-filament with a Silam silicone impregnation. The special design allows the belt to operate on small pulleys and knife edges.

#### **Main features**

- Longitudinally flexible; suitable for small diameter transfers and knife edges
- Dimensionally stable; excellent tracking properties and perfectly flat
- · Low friction bottomside
- Resistant against high temperatures
- Seamless

#### **Benefits**

- Quick installation or repair; shortest production downtime
- Smooth, economical operation; less energy consumption
- ATEX approved

### **Applications**

- · Infeed belt for conti-press
- Transfer belt

Technical data	
Belt type	Silam EZP 8/1 0+01 red HR
Article code	583060 / 583061
Tension layer	ZipLink® mesh for easy and quick belt change
Belt thickness	1.9 mm
Weight	1.75 kg/m²
Force at 1% elongation	8 N/mm
Min. pulley diameter flexing / back flexing	6 / 10 mm
Temperature range	-40 to +180°C
Max. standard / production width	3100 / 4000 mm

Silam and ZipLink® are brandnames of Ammeraal Beltech





Easy to use insertion tool

Complete toolbox available, including instruction CD




Dynasteam – the special infeed belt which can speed up

your production process by 10-30%!




### Specialised Belting Solutions

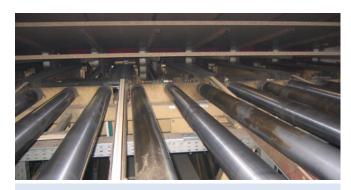

### Specialised Belts, custom-made designs

- Positive drive, no belt slip.
- Thermoplastic and rubber covers in varying durometers and materials.
- Endless Woven pre-press belts. The truly endless construction eliminates the risk of splice failure.
  With antistatic properties to prevent static loading.
- · UV resistant belts.



#### uni Modular Belts with integrated rollers

- Excellent positioning of furniture, flooring, or shelves.
- Positive drive prevents mistracking.
- Impact resistance combined with excellent wear resistance characteristics.
- High efficiency by eliminating jams, line stoppages, and product damage.




#### **Engineered Belts**

- Belts for modern production processes.
- Wide range of cover materials.
- Pin Joint for easy connection.



#### **High Performance Flat Belts**

- · High performance roller drive belts.
- Quick splicing for less downtime.
- · High performance drive belts.
- Belt calculation program.

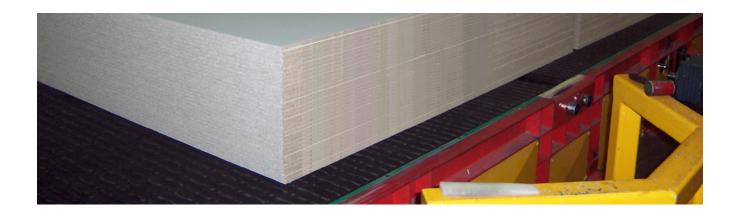

### Just-in-time delivery

At Ammeraal Beltech, we understand the importance of keeping your business running because we know just how costly and disruptive downtime can be.

A solid combination of geographical coverage, industry-segment knowledge and product management is the foundation of our innovative and service-oriented organisation.

Ammeraal Beltech has a Global Sales and Service Team and Partner Network ready to help round the clock!



28 fully owned operating companies

and over 150 authorized distributors



# Excellent products, service, advice and fabrication

- Ammeraal Beltech offers a wide range of belting solutions and accessories to help you improve processes to secure a seamless operation.
- Skilled personnel are on call to install or repair belts, using professional equipment that is suitable for wood production plants.
- Most orders can be dispatched directly from stock.



### Quick, easy and precise belt splicing

With our expanded Maestro splice equipment range, Ammeraal Beltech has taken an important step forward in the critical areas of splice quality, speed, and precision.

Our new compact, hand-held, computerized splicing press control-box is the perfect complement to our Maestro press, and makes precise splicing as easy as 1-2-3.

Find out more at www.ammeraalbeltech.com



### **Local Contacts**

... and 150 more service contact points at ammeraalbeltech.com

Argentina

T+54 11 4218 2906 info-an@ammeraalbeltech.com

T+61 3 8780 6000 info-au@ammeraalbeltech.com

T+43 171728 133 info-de@ammeraalbeltech.com

Belgium

T+32 2 466 03 00 info-be@ammeraalbeltech.com

T+1 905 890 1311 info-ca@ammeraalbeltech.com

Chille

T+56 2 233 12900 info-cl@ammeraalbeltech.com

China

T+86 512 8287 2709 info-cn@ammeraalbeltech.com

Colombia

T+57 1 893 9890 info-co@ammeraalbeltech.com

Czech Republic

T+420 567 117 211 info-cz@ammeraalbeltech.com

T+45 7572 3100 info-dk@ammeraalbeltech.com

T+358 207 911 400 info-fi@ammeraalbeltech.com

T+33 3 20 90 36 00 info-fr@ammeraalbeltech.com

T+49 4152 937-0 info-de@ammeraalbeltech.com

Hungary

T+36 30 311 6099 info-hu@ammeraalbeltech.com

T+91 44 265 34 244 info-in@ammeraalbeltech.com

T+972 4 6371485 info-il@ammeraalbeltech.com

T+39 051 660 60 06 info-it@ammeraalbeltech.com

japan

T+81 52 433 7400 info-jp@ammeraalbeltech.com

Luxembourg

T+352 26 48 38 56 info-lu@ammeraalbeltech.com

Malaysia

T+60 3 806 188 49 info-my@ammeraalbeltech.com

T+52 55 5341 8131 info-mx@ammeraalbeltech.com

Netherlands

T+31 72 57 51212 info-ni@ammeraalbeltech.com

T+51 1 713 0069 info-pe@ammeraalbeltech.com

T+48 32 44 77 179 info-pl@ammeraalbeltech.com Portugal

T+351 22 947 94 40 info-pt@ammeraalbeltech.com

Singapore

T+65 62739767 info-sq@ammeraalbeltech.com

T+421 255648542 info-sk@ammeraalbeltech.com

South Korea

T+82 31 448 3613-7 info-kn@ammeraalbeltech.com

T+34 93 718 3054 info-es@ammeraalbeltech.com

Sweden

T+46 (0) 10 130 96 00 Info-se@ammeraalbeltech.com

Switzerland

T+41 55 2253 535 info-ch@ammeraalbeltech.com

Thailand

T+66 2 902 2604-13 info-th@ammeraalbeltech.com

T+90 232 877 0700 info-tr@ammeraalbeltech.com

United Kingdom T+44 1992 500550

info-uk@ammeraalbeltech.com

T+1 847 673 6720 Info-us@ammeraalbeltech.com

T+84 8 376 562 05 Info-vn@ammeraalbeltech.com Expert advice, quality solutions and local service for all your belting needs











General contact information:

Ammeraal Beltech

P.O. Box 38 1700 AA Heerhugowaard The Netherlands

T+31 (0)72 575 1212 info@ammeraalbeltech.com

ammega.com