

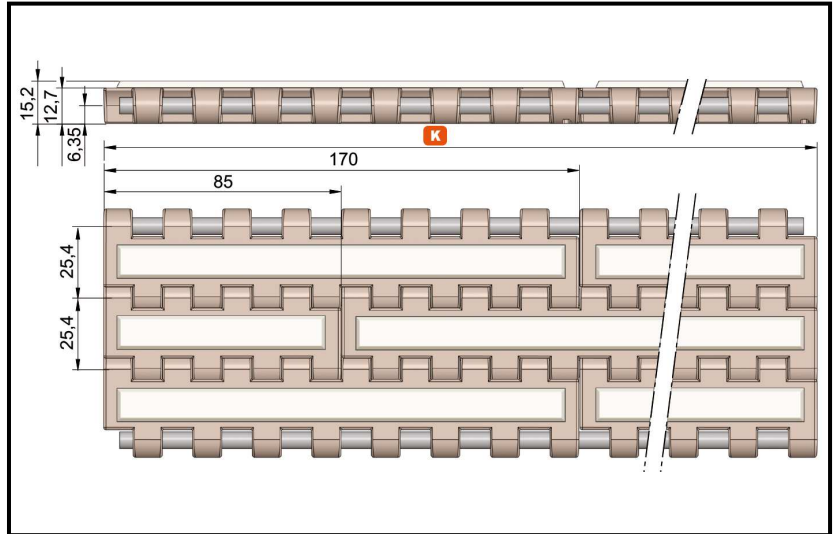


# SERIE 9255GF

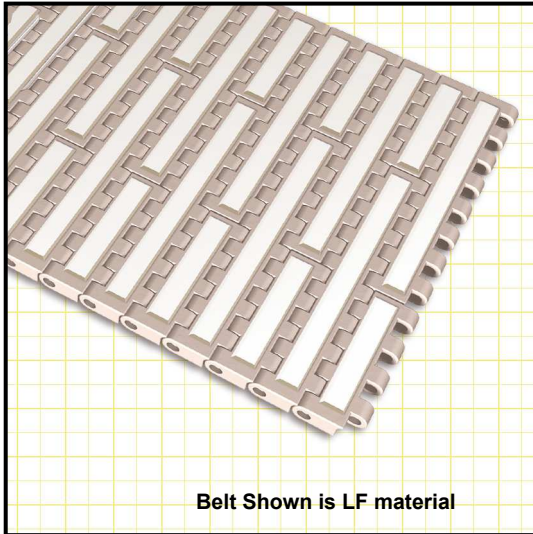

COD.	K		Kg/m <sup>2</sup>			Open Surface	*Ri (mm)	Ømin. (mm)
	mm	inch	ACETAL (LF)	KEVLAR (KV)	POLYPROPYLENE (BLPP)			
** 9255GF01.01	85	3,346	13,57	8,67	0%	25	142,9	
** 9255GF01.02	170	6,692						
** 9255GF01.03	255	10,039						
** 9255GF01.04	340	13,385						
.....								
** 9255GF01.19	1615	63,582						
** 9255GF01.20	1700	66,929						

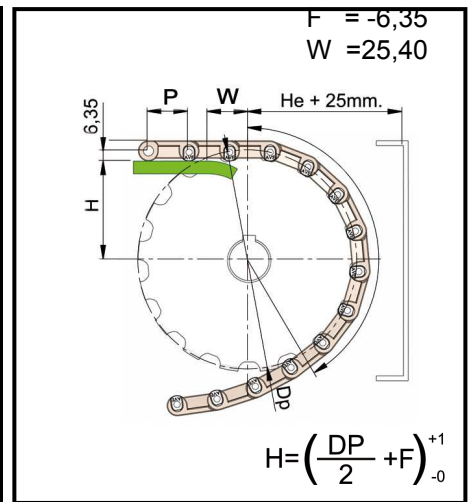


\* Ri: Back-flex Radius

** Prefix	Chain material	Color	Ø Pin (mm)	Standard Pin Material	Minimum Temperature	Maximum Temp.		TT N/m	FDA Approval
						Dry enviroment	Wet enviroment		
LF	Acetal-LF	Brown	6	PP	+5	+85	+70	34000	✓
KV ●	Acetal-Kevlar	Grey							-
BLPP ●	Polypropylene	Blue							✓

Z	Ø De	Ø Dp	He
16	127,5	130,2	71,5
18	143,5	146,28	79,5
19	151,3	154,33	83,5
20	159,5	162,38	87,5
21	167,6	170,43	91,6

### Available types

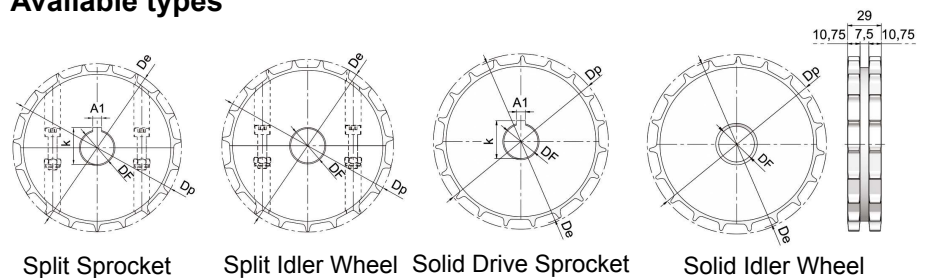

### Remarks

- ● Made to order
- Other materials available under request
- Nominal sizes & weights are according to acetal raw material, and may vary for the rest of raw materials used