

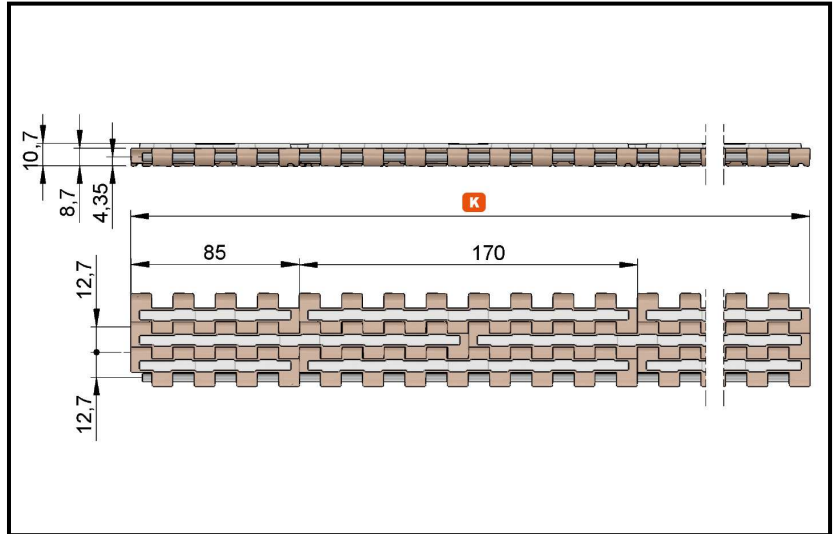


SERIE 9123GF

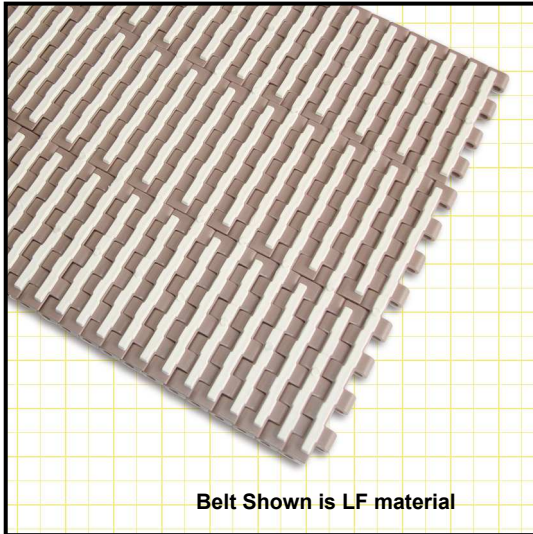

COD.	K		Kg/m ²		Open Surface	*Ri (mm)	Ømin. (mm)
	mm	inch	ACETAL (LF)	KEVLAR (KV)			
** 9123GF01	85	3,346	8,91	8,91	0%	15	73,8
** 9123GF02	170	6,692					
** 9123GF03	255	10,039					
** 9123GF04	340	13,385					
.....							
** 9123GF19	1615	63,582					
** 9123GF20	1700	66,929					

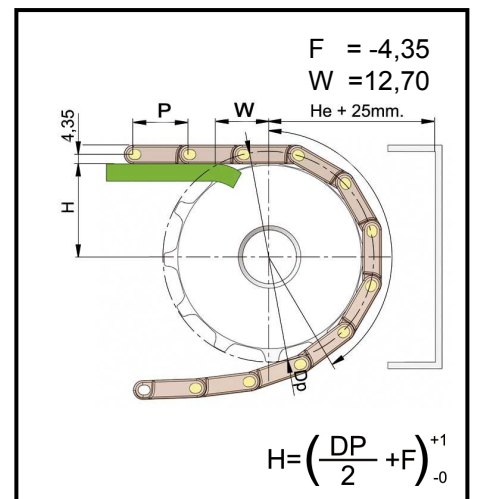


* Ri: Back-flex Radius

** Prefix	Chain material	Color	Ø Pin (mm)	Standard Pin Material	Minimum Temperature	Maximum Temp.		TT N/m	FDA Approval
						Dry enviroment	Wet enviroment		
LF	Acetal-LF	Brown	6	PP	+5	+85	+70	34000	✓
KV ●	Acetal-Kevlar	Grey							

Z	Ø De	Ø Dp	He
16	66	65,1	36,9
20	82,5	81,2	44,9
28	115	113,4	61,05
30	123	121,5	65,1
32	131	129,6	69,15
36	147	145,7	77,2
38	155	153,8	81,3
42	171	170,0	89,3

Available types

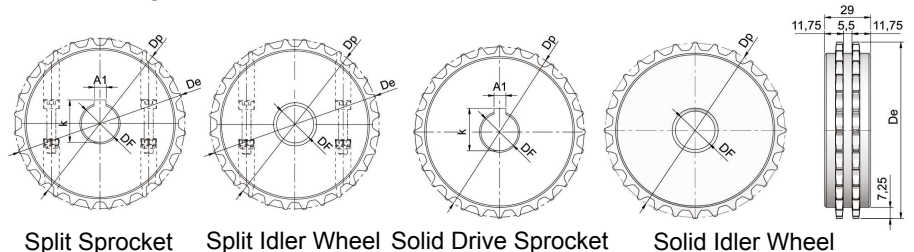

Remarks

- ● Made to order
- Other materials available under request
- Nominal sizes & weights are according to acetal raw material, and may vary for the rest of raw materials used