



# SERIE 9255

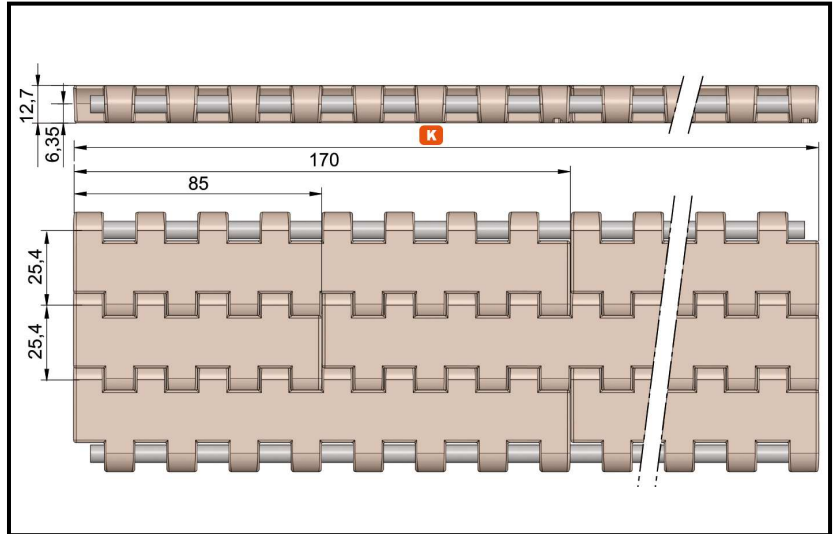

COD.	K		Kg/m <sup>2</sup>		Open Surface	*Ri (mm)	Ømin. (mm)
	mm	inch	ACETAL (LF)	KEVLAR (KV)			
** 925501	85	3,346	12,93	12,93	0%	25	142,9
** 925502	170	6,692					
** 925503	255	10,039					
** 925504	340	13,385					
.....							
** 925519	1615	63,582					
** 925520	1700	66,929					

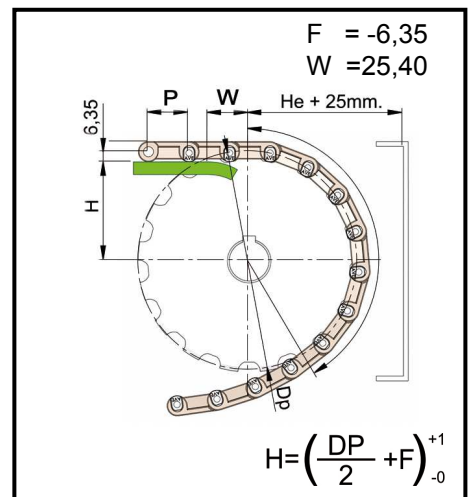


\* Ri: Back-flex Radius

** Prefix	Chain material	Color	Ø Pin (mm)	Standard Pin Material	Minimum Temperature	Maximum Temp.		TT N/m	FDA Approval
						Dry enviroment	Wet enviroment		
LF	Acetal-LF	Brown	6	PP	+5	+85	+70	34000	✓
KV ●	Acetal-Kevlar	Grey							-

Z	Ø De	Ø Dp	He
16	127,5	130,2	71,5
18	143,5	146,28	79,5
19	151,3	154,33	83,5
20	159,5	162,38	87,5
21	167,6	170,43	91,6

### Available types

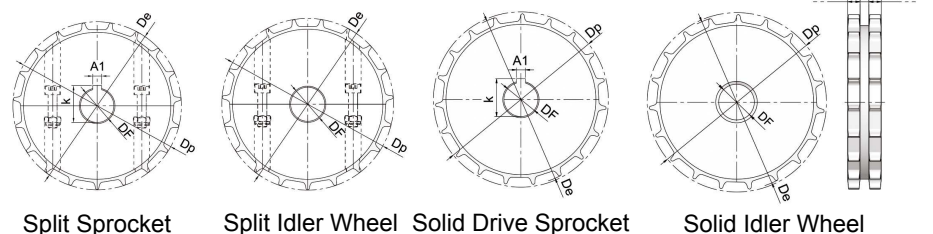

### Remarks

- ● Made to order
- Other materials available under request
- Nominal sizes & weights are according to acetal raw material, and may vary for the rest of raw materials used