




Special Plastic Chain

Series **uni NH78** Type -

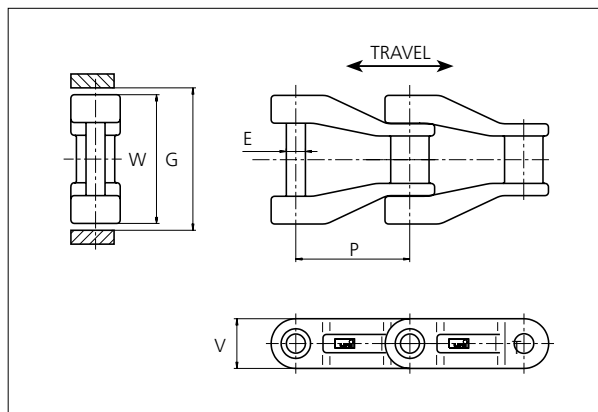

Special Plastic Chain

Straight running chain
Pitch: 66.3 mm (2.61 in)
Backflex radius: 75.0 mm (3.00 in)
Permissible tensile strength:
T1: 9000 N (2023 lbf)
T2: 7000 N (1574 lbf)
T3: 6000 N (1349 lbf)
T4: 6000 N (1349 lbf)
T5: 5000 N (1124 lbf)

Standard shipping lengths:
boxes of 92 links
= 6.100 m (20.0 ft)

E		G		P		V	
mm	in	mm	in	mm	in	mm	in
11.0	0.43	78.0	3.07	66.3	2.61	28.6	1.13

All dimensions are for chains in POM material.

Standard material & colors

Width (W)			Material & color	Pin material	Pin fixing	Pin ø		Weight	
	mm	in				mm	in	kg/m	lb/ft
uni NH78 T1	74.0	2.91	POM-LF POM-D BR G	SS431	Staked	11.0	0.43	2.1	1.41

Non Standard material & colors

Width (W)			Material & color	Pin material	Pin fixing	Pin ø		Weight	
	mm	in				mm	in	kg/m	lb/ft
uni NH78 T2	74.0	2.91	PBT-GR PA6-GF K K	SS431	Staked	11.0	0.43	2.1	1.41
uni NH78 T3	74.0	2.91	PA6-GF K	SS431	Staked (PE sleeve)	10.0	0.39	2.1	1.41
uni NH78 T4	74.0	2.91	PA6-GF K	SS431	Cotterpin (PE sleeve)	10.0	0.39	2.1	1.41
uni NH78 T5	74.0	2.91	PP-AR N	SS431	Staked	11.0	0.43	2.1	1.41

STANDARD

STRAIGHT RUNNING


PITCH 66.3 MM/2.61 IN

Sprocket

No. of teeth	Pitch diameter		Overall-diameter		Min. ø bore		Max. ø bore		Hub-diameter		A-dimension		B-dimension		 Machined PA6
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	
Z6	132.6	5.22	137.4	5.40	20.0	0.80	40.0	1.60	65.0	2.60	43.1	1.70	80.6	3.20	✓
Z8	173.3	6.82	182.6	7.20	20.0	0.80	40.0	1.60	65.0	2.60	65.8	2.60	100.9	4.00	✓
Z10	214.5	8.44	226.6	8.90	20.0	0.80	50.0	2.00	73.5	2.90	87.7	3.50	121.6	4.80	✓

Machined sprocket


Non standard material and color:
See uni Material and Color Overview.

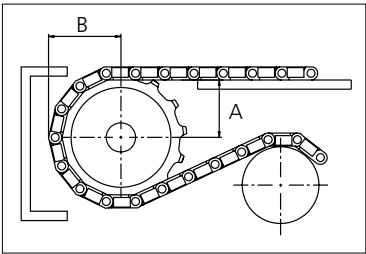

Please ensure that sufficient size shaft and keyway are chosen for corresponding load.

Other sprocket sizes are available upon request
Width of tooth: 15.8 mm/0.62 in
Width of sprocket: 42.3 mm/1.67 in
uni Retainer Rings: See uni Retainer Ring data sheet


uni NH78/2021.08.23




Synthetic Belts



Endless Woven Belts



Modular Belts



Engineered Belts



Homogeneous Belts



Fabrication & Service

Expert advice and quality solutions
for all your belting needs.
ammeraalbeltech.com

Ammeraal Beltech Modular A/S
Hjulgagervej 21
DK-7100 Vejle
T +31 7572 3100

ammega.com

This information is subject to alteration due to continuous development. Ammeraal Beltech will not be held liable for the incorrect use of the above stated information. This information replaces previous information. All activities performed and services rendered by Ammeraal Beltech are subject to general terms and conditions of sale and delivery, as applied by its operating companies.

Member of Ammega Group.