

PU Linear XH Aramid

Article code: TBPU000124

General information

Productgroup	Timing belts, PU Linear
Industry segment	General industry; Wood; Building materials: Stone & ceramics, Bricks & tiles
Main product feature	Positive drive, Wear resistant

Belt construction

Tension member		aramid
Material	body	Polyurethane
Surface	tooth side	Polyurethane
	back side	Polyurethane

Characteristics


Food Grade (FG)	no	
Antistatic (AS)	no	
Oil & Fat resistance	yes	

Technical data

Tooth	profile		XH		
	pitch		22.225 mm	0.87 in.	
Hardness body material	ISO 868		92A Shore		
Belt thickness	total		11.2 mm	0.44 in.	
Belt weight			9.9 kg/m ²	2.03 lbs/ft ²	
Coefficient of friction	tooth side to steel	dynamic	0,5		
Operating temperature	continuous	from / to	-10 / 80 °C	14 / 176 °F	
Minimum pulley diameter	A) without counter flexing	number of teeth, t1	18		
		d1	124.54 mm	4.9 in.	
		d2	120 mm	4.72 in.	
	B) with counter flexing	number of teeth, t1	20		
		d1	138.69 mm	5.46 in.	
		d2	150 mm	5.91 in.	
Belt width	maximum		152.4 mm	6 in.	
Endless length	minimum		1200 mm	47.24 in.	
Manufacturing length	standard		100000 mm	328.08 ft.	

Reference images

Side view

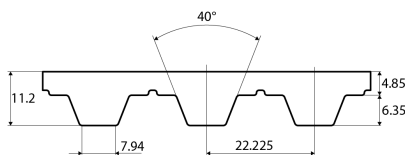

A) without counter flexing



B) with counter flexing



Fabrication

This information on the fabrication options is general, please contact Ammeraal Beltech for the specific fabrication possibilities of the timing belt of your choice.

Open end, prepared splice, spliced endless with mechanical fastener or a pin joint fastener.

Cleats welded or mechanically attached, metal teeth, guides welded or glued.

Covers can be welded, glued, coated or vulkanized onto the back side of the timing belt.

Thermoplastic covers can be embossed. Perforations, lateral and longitudinal slots, lateral and longitudinal profiles.

Additional Information

Tooth profile according to standard: metric ISO 17396 , imperial ISO 5296-1, curvilinear ISO 13050, depending on the belt type.

This sheet contains typical values, which apply to a temperature of approx. 20 °C (68 °F), unless otherwise stated, individual data may differ.

Consult our specialists for further information like technical calculations. Instructions regarding joining, storage & maintenance and tracking & tensioning.

Standard belt width [mm]	Allow. tensile load Linear open end & Torque [N]	Allow. tensile load Linear welded endless [N]		Spring force [N]
25.4	2800	1400		792000
50.8	5600	2800		1584000
76.2	8400	4200		2376000
101.61	11200	5600		3168000

Speed rpm [1/min]	Specific tooth force [N/mm]	Specific power [W/mm]	
0	9.6	0	
25	9.266	0.086	
50	8.953	0.166	
75	8.67	0.241	
100	8.383	0.311	
150	7.926	0.44	
200	7.48	0.554	
300	6.942	0.771	
400	6.553	0.971	
500	6.248	1.157	
750	5.691	1.581	
1000	5.288	1.959	
1250	4.977	2.304	
1500	4.719	2.622	
1750	4.502	2.918	
2000	4.314	3.196	
3000	3.74	4.156	
4000	3.331	4.935	

Standard