

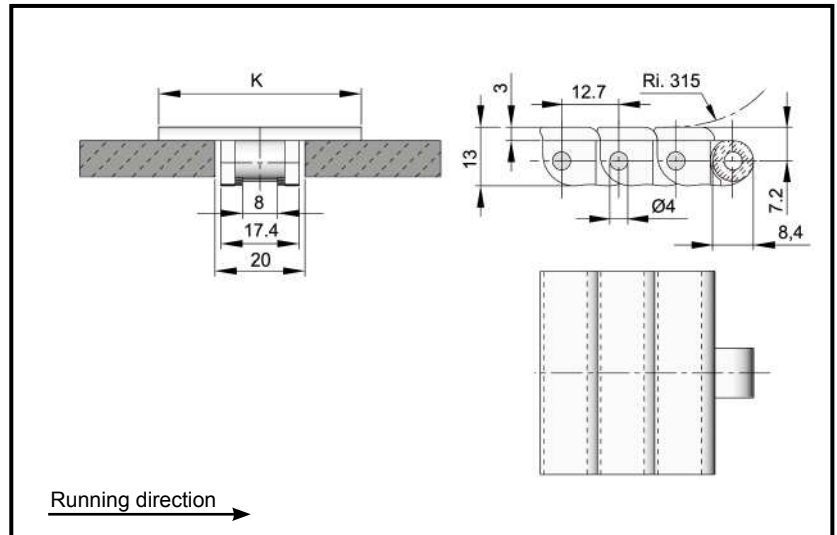


SERIE 450

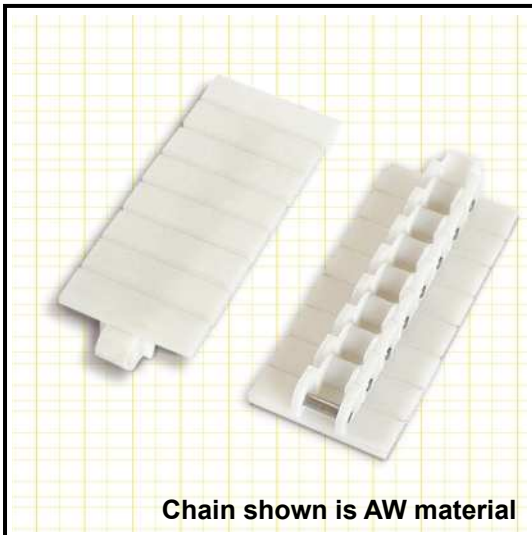

COD.	K		Kg/m	Open Surface	RM (mm)	*Ri (mm)
	mm	inch				
450 32	32	1,25	0,3	0%	-	315
450 45	45	1,75	0,4	0%	-	315

* Ri: Back-flex Radius

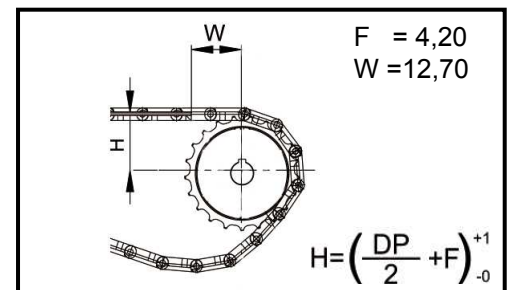


** Prefix	Chain material	Color	Ø Pin (mm)	Standard Pin Material	Minimum Temperature	Maximum Temp.		TT	FDA Approval
						Dry enviroment	Wet enviroment	N	
AW ●	Acetal-AW	White	4	SS304	-40	+85	+70	2500	✓

* Standard sprockets ISO 08B1

Z	Ø De	Ø Dp
12	53,9	49,07
13	57,9	53,06
14	61,9	57,07
15	65,9	61,09
16	69,9	65,10
17	74	69,11
18	78	73,14
19	82	77,16
20	86	81,19
21	90,1	85,22
23	98,1	93,27
25	106,2	101,33

Available types



Drive - Idler Sprocket

Remarks

- Standard packaging 3,048m 10ft.
- ● Made to order