

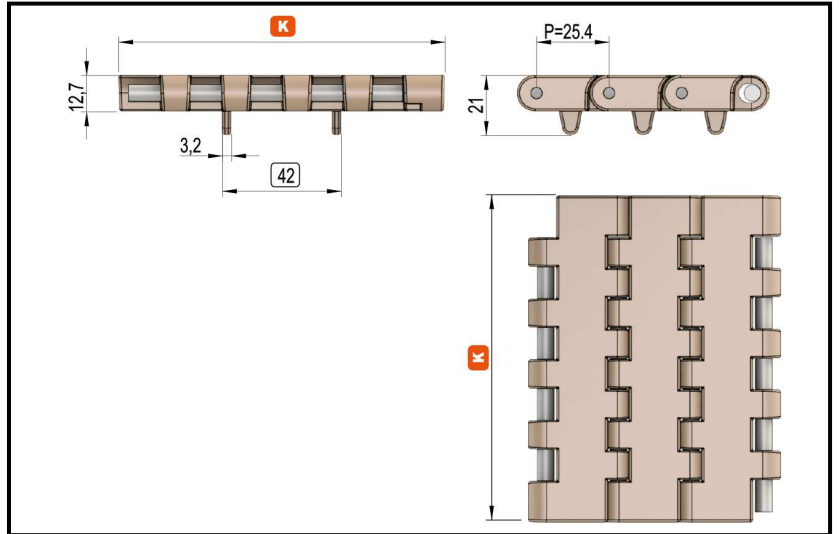


SERIE 9255MC P2

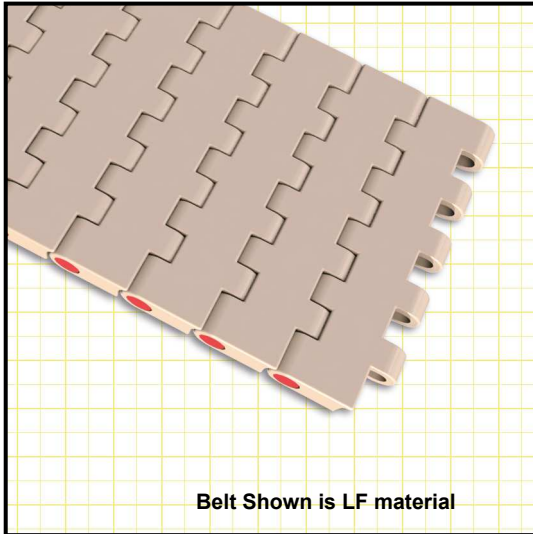

COD.	K		Kg/m			Open Surface	*Ri (mm)	Ømin. (mm)
	mm	inch	ACETAL (LF)	KEVLAR (KV)	POLYPROPYLENE (BLPP)			
** 9255MC.0134P2	114,3	4,5	1,44	0,96	0%	25	142,9	
** 9255MC.0224P2	190,5	7,5	2,40	1,60				


* Ri: Back-flex Radius

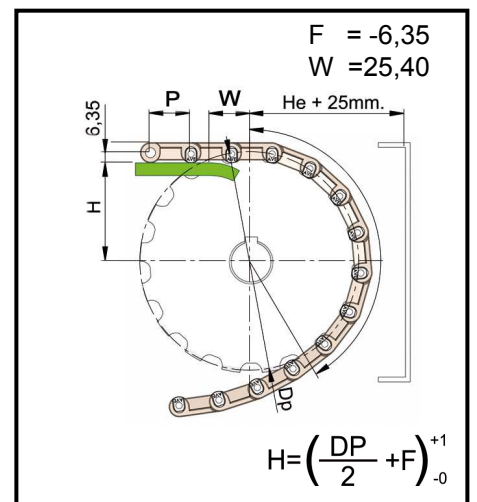

** Prefix	Chain material	Color	Ø Pin (mm)	Standard Pin Material	Minimum Temperature	Maximum Temp.		TT N/m	FDA Approval
						Dry enviroment	Wet enviroment		
LF	Acetal-LF	Brown	6	PP	+5	+85	+70	34000	✓
KV ●	Acetal-Kevlar	Grey							-
BLPP ●	Polypropylene	Blue							17000

Z	Ø De	Ø Dp	He
16	127,5	130,2	71,5
18	143,5	146,28	79,5
19	151,3	154,33	83,5
20	159,5	162,38	87,5
21	167,6	170,43	91,6

Available types

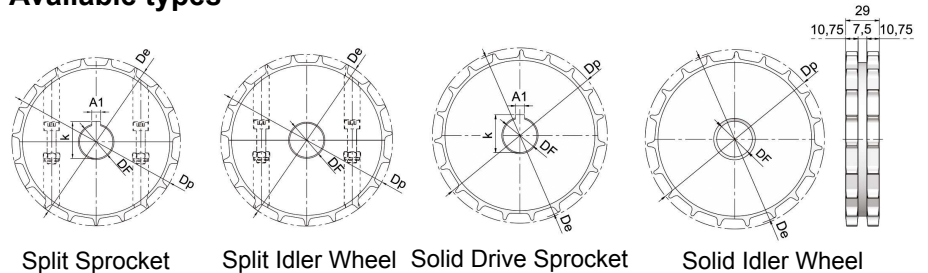

Remarks

- ● Made to order
- Other materials available under request
- Nominal sizes & weights are according to acetal raw material, and may vary for the rest of raw materials used