

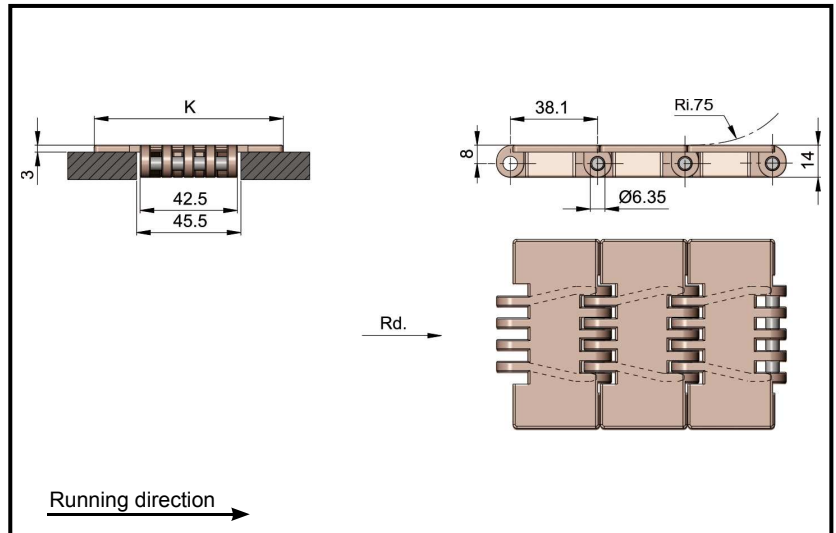


SERIE 900

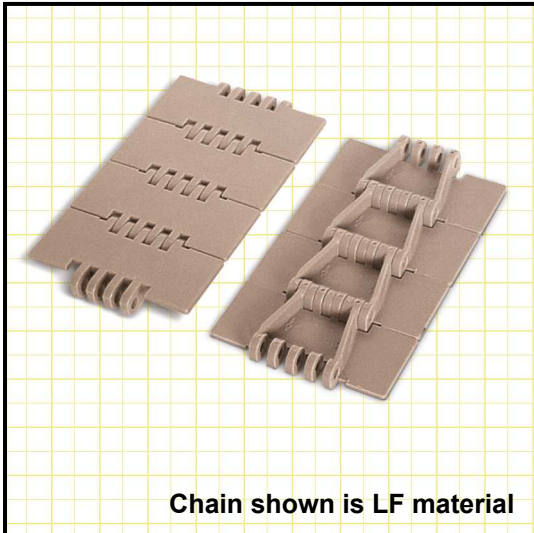

COD.	K		Kg/m	Open Surface	RM (mm)	Ri (mm)
	mm	inch				
** 903	82,5	3,25	0,87	0%	-	75
** 904	90	3,54	0,91			
** 905	100	3,94	0,95			


* Ri: Back-flex Radius

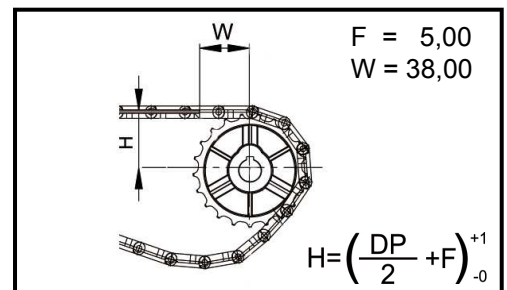

** Prefix	Chain material	Color	Ø Pin (mm)	Standard Pin Material	Minimum Temperature	Maximum Temp.		TT	FDA Approval
						Dry enviroment	Wet enviroment	N	
LF ●	Acetal-LF	Brown	6,35	SS304	-40	+85	+70	1750	✓

Z	Ø De	Ø Dp
19	117	117,34
21	129	129,26
23	141	141,22
25	153	153,22

Available types



Remarks

- Standard packaging 3,048m 10ft.
- ● Made to order
- Other materials available under request