

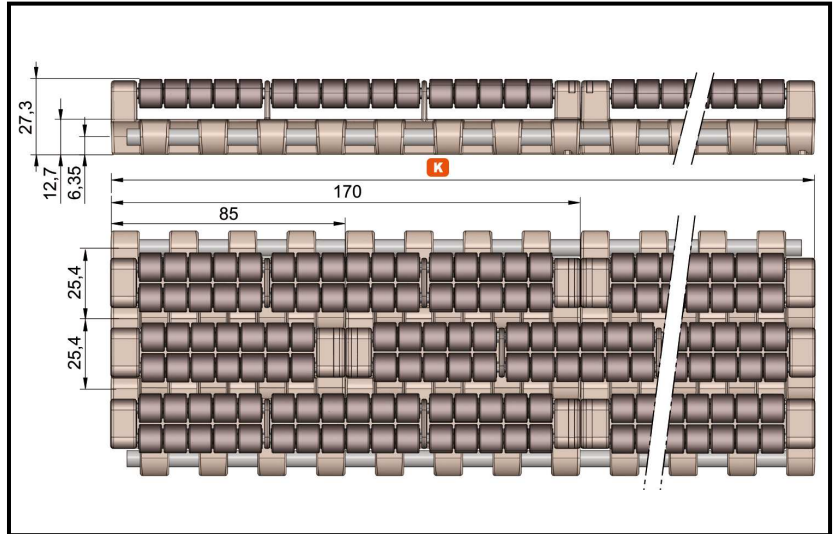


SERIE 9255BP

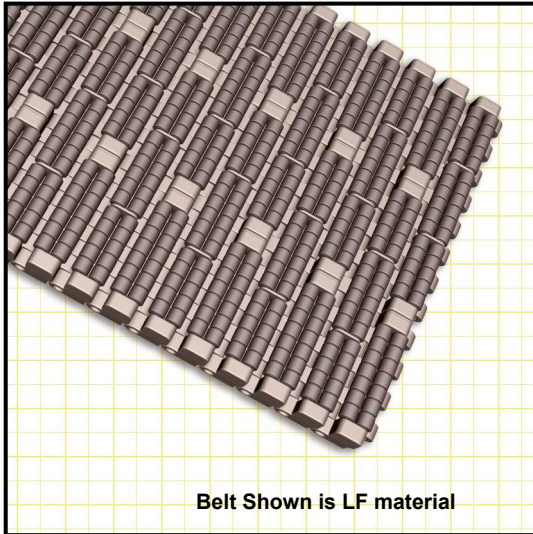

COD.	K		Kg/m ² ACETAL (LF)	Open Surface	*Ri (mm)	Ømin. (mm)
	mm	inch				
** 9255BP01	85	3,346	28,63	0%	-	142,9
** 9255BP02	170	6,692				
** 9255BP03	255	10,039				
** 9255BP04	340	13,385				
.....						
** 9255BP19	1615	63,582				
** 9255BP20	1700	66,929				

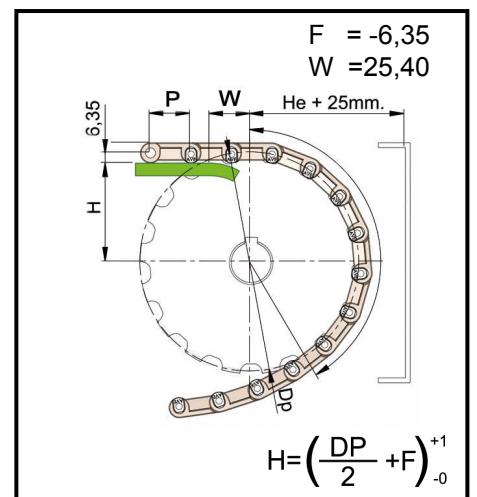


* Ri: Back-flex Radius

** Prefix	Chain material	Color	Ø Pin (mm)	Standard Pin Material	Minimum Temperature	Maximum Temp.		TT N/m	FDA Approval
						Dry enviroment	Wet enviroment		
LF	Acetal-LF	Brown	6	PP	+5	+85	+70	34000	✓

Z	Ø De	Ø Dp	He
16	127,5	130,2	71,5
18	143,5	146,28	79,5
19	151,3	154,33	83,5
20	159,5	162,38	87,5
21	167,6	170,43	91,6

Available types

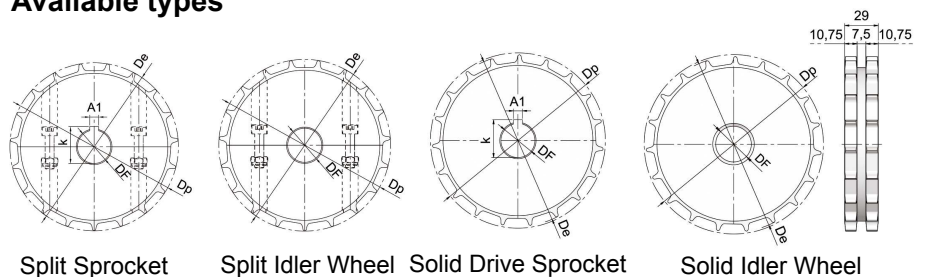

Remarks

- LF Standard Production
- Other materials available under request
- Nominal sizes & weights are according to acetal raw material, and may vary for the rest of raw materials used