



SERIE 1873 GA

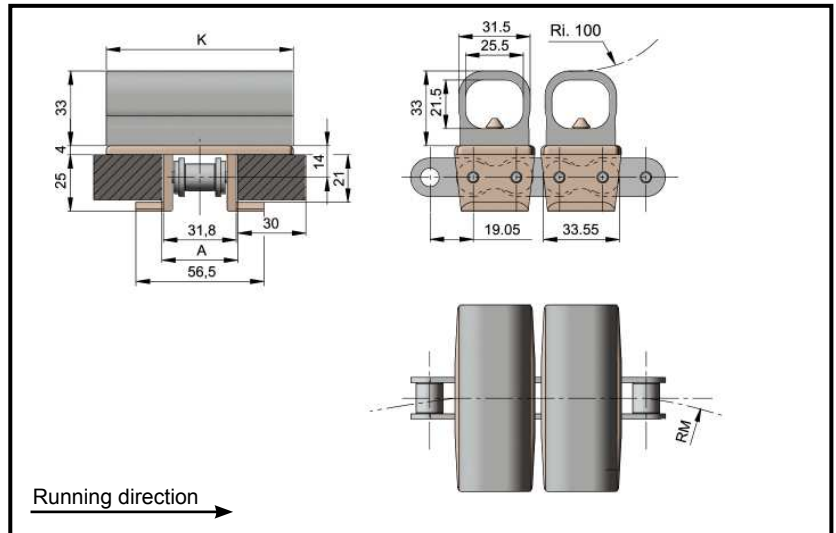

COD.	K		Kg/m	Pin material	RM (mm)	*Ri (mm)
	mm	inch				
** 1873GA 325TAB	82,5	3,25	3,60	Steel	356	100
** 1873SSGA 325TAB				Stainless Steel		

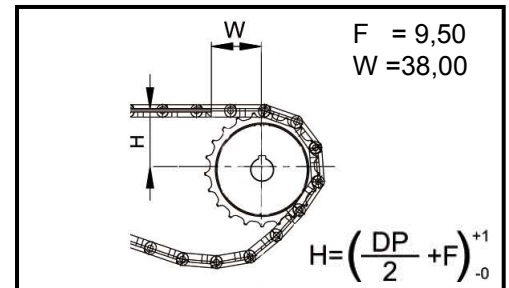


* Ri: Back-flex Radius

** Prefix	Chain material	Color	Ø Pin (mm)	Standard Pin Material	Minimum Temperature	Maximum Temp.		TT N	FDA Approval
						Dry enviroment	Wet enviroment		
LF ●	Acetal-LF	Brown	5,95	S	-40	+85	+70	4500	✓
				SS304				3500	

Z	Ø De	Ø Dp	S
15	100,0	91,63	35
17	112,0	103,67	
19	124,1	115,75	
21	136,2	127,82	40
23	148,2	139,90	
25	160,3	152,0	
27	172,4	164,09	
29	184,5	176,19	
30	190,6	182,25	
31	196,6	188,35	

Available types



Drive - Idler Sprocket

Remarks

- Standard packaging 3,048m 10ft.
- ● Flights. Made to order
- ● S and SS base chains. Made to order
- Other materials available under request