

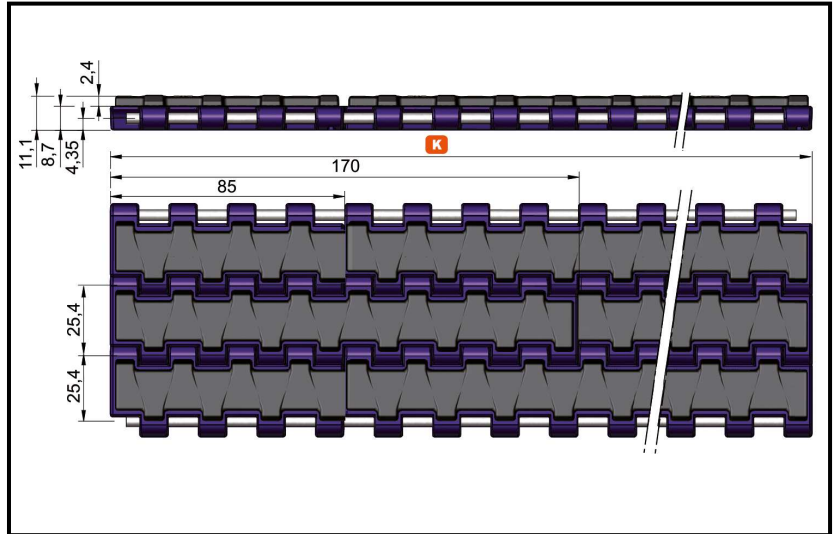


SERIE 9253GF

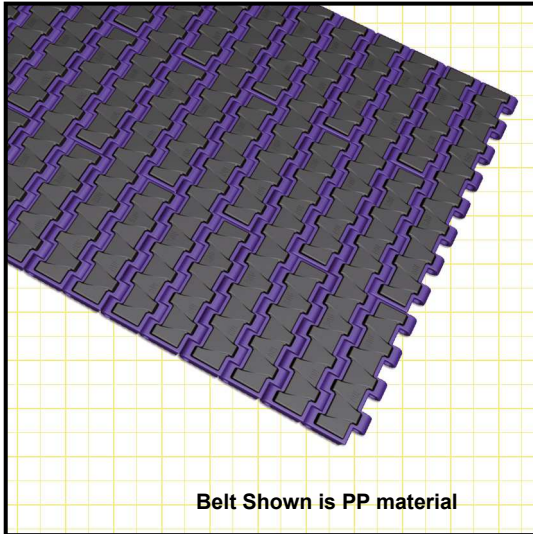

COD.	K		Kg/m ²			Open Surface	*Ri (mm)	Ømin. (mm)
	mm	inch	ACETAL (LF)	KEVLAR (KV)	POLYPROPYLENE (BLPP)			
** 9253GF01.01	85	3,346	9,34	6,52	0%	20	106,85	
** 9253GF01.02	170	6,692						
** 9253GF01.03	255	10,039						
** 9253GF01.04	340	13,385						
.....								
** 9253GF01.19	1615	63,582						
** 9253GF01.20	1700	66,929						

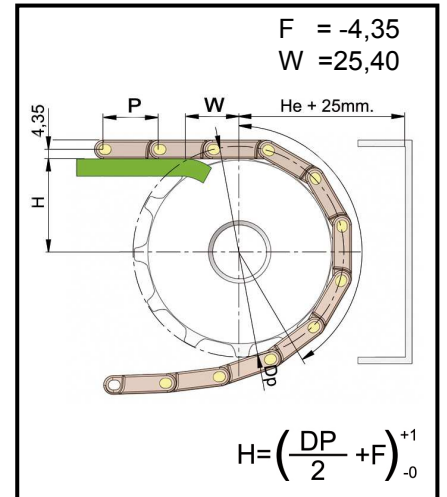


* Ri: Back-flex Radius

** Prefix	Chain material	Color	Ø Pin (mm)	Standard Pin Material	Minimum Temperature	Maximum Temp.		TT N/m	FDA Approval
						Dry enviroment	Wet enviroment		
LF	Acetal-LF	Brown	4	PP	+5	+85	+70	20000	✓
KV ●	Acetal-Kevlar	Grey							-
BLPP ●	Polypropylene	Blue							10000

Z	Ø De	Ø Dp	He
12	97	98,15	53,4
16	130	130,2	69,5
18	146	146,28	77,5
19	154,5	154,33	81,5
20	162,5	162,38	85,5
21	170,5	170,4	89,6

Available types

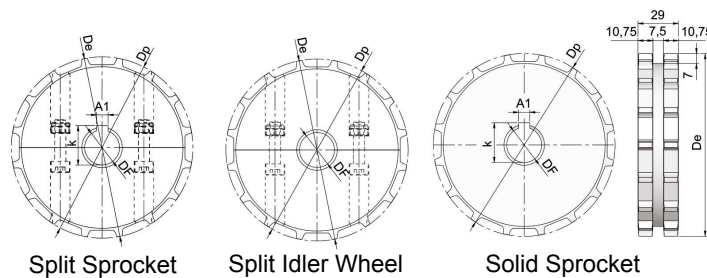

Remarks

- ● Made to order
- Other materials available under request
- Nominal sizes & weights are according to acetal raw material, and may vary for the rest of raw materials used