

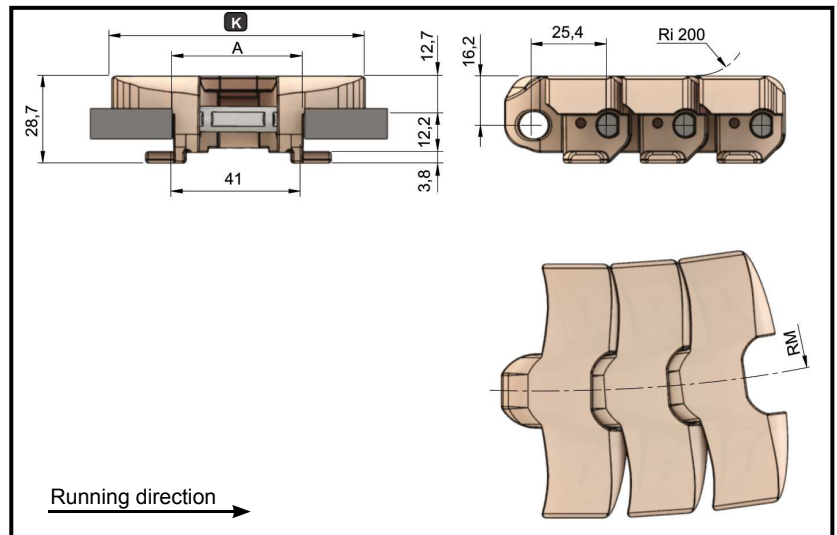


SERIE 2505 FT TAB

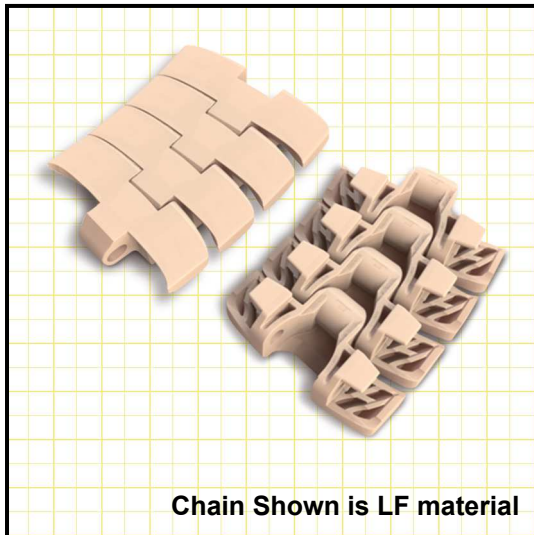

COD.	K		Kg/m		Open Surface	RM (mm)	*Ri (mm)
	mm	inch	KV	LF			
** 2505FT330TAB	83,7	3,3	2,15	2,14	%	500	200
** 2505FT450TAB	114,3	4,50	2,48	2,47			





* Ri: Back-flex Radius

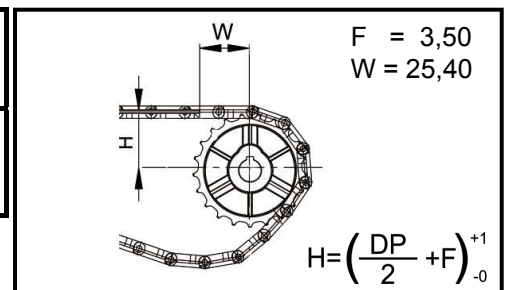

** Prefix	Chain material	Color	Ø Pin (mm)	Standard Pin Material	Minimum Temperature	Maximum Temp.		TT N	FDA Approval
						Dry enviroment	Wet enviroment		
LF	Acetal-LF	Brown	8	SS430	-40	+85	+70	2200	✓
KV ●	Acetal-Kevlar	Grey							-

Z	Ø De	Ø Dp
16	130,9	128,9
18	146,8	144,8
19	156,3	154,3

Available types



Remarks

- Standard packaging 3,048m 10ft.
- ● Made to order
- LF Standard Production
- Other materials available under request