

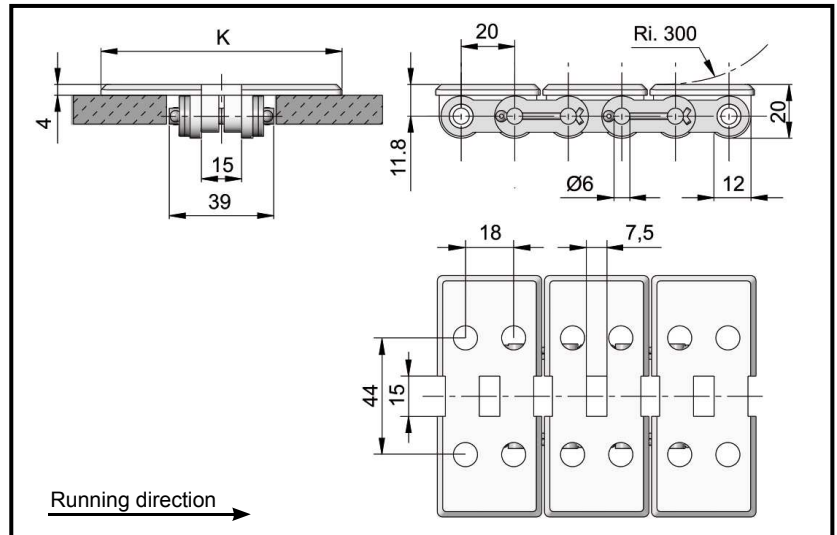


SERIE 400

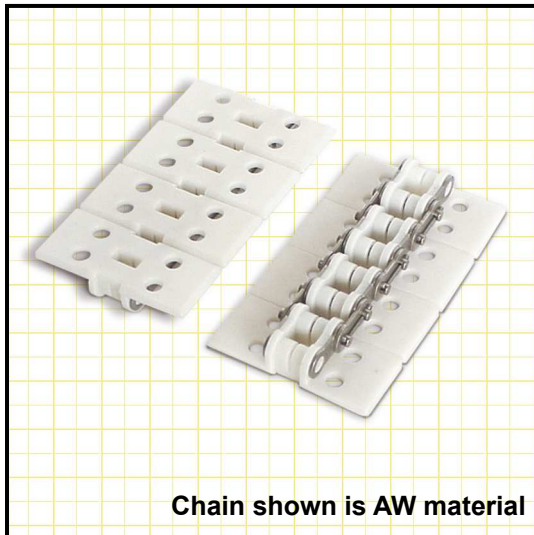

COD.	K		Kg/m	Open Surface	RM (mm)	*Ri (mm)
	mm	inch				
400 90	90	3,54	1,50	14%	-	300


* Ri: Back-flex Radius

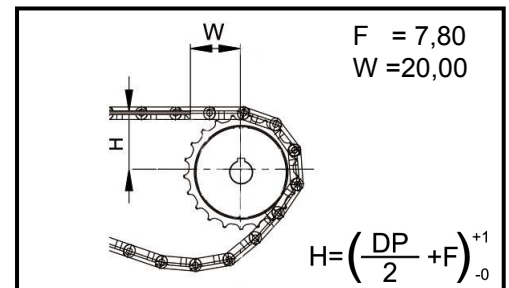

** Prefix	Chain material	Color	Ø Pin (mm)	Standard Pin Material	Minimum Temperature	Maximum Temp.		TT N	FDA Approval
						Dry enviroment	Wet enviroment		
AW ●	Acetal-AW	White	6	SS304	-40	+85	+70	2500	✓

Z	Ø De	Ø Dp
19	130	121,52
21	136,5	134,20
23	154	146,90
25	168	159,58

Available types

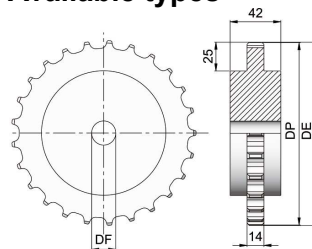

Drive - Idler Sprocket

Remarks

- Standard packaging 3,048m 10ft.
- ● Made to order