

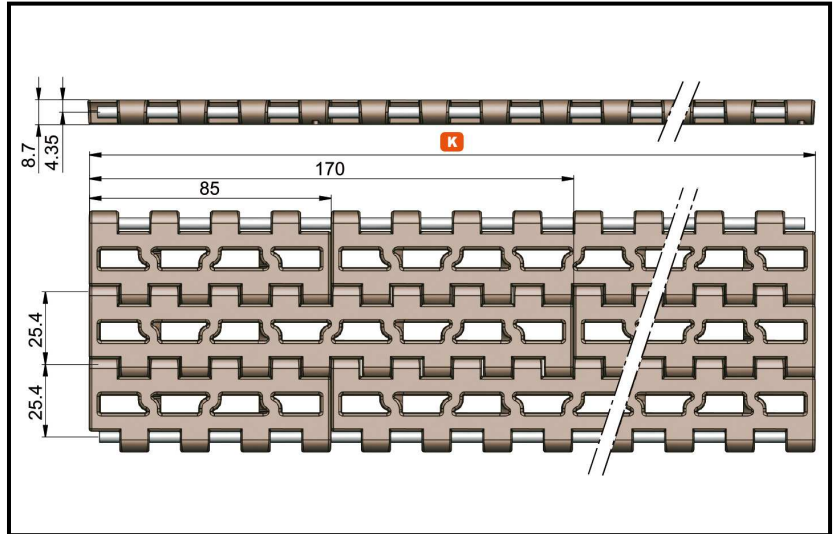


SERIE 9253V

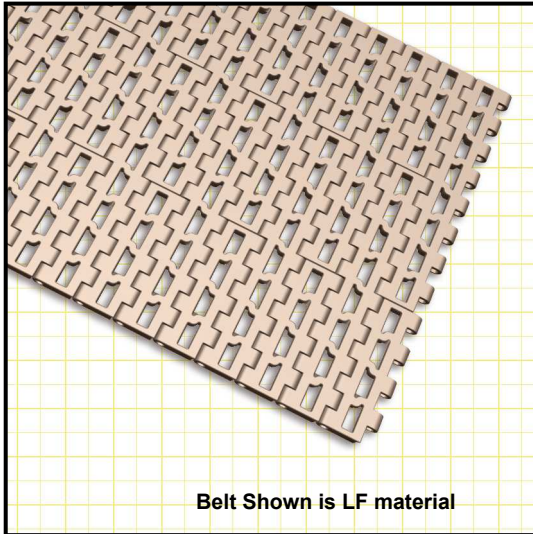

| COD. | K | | Kg/m ² | | Open Surface | *Ri (mm) | Ømin. (mm) |
|------------|------|--------|-------------------|-------------|--------------|----------|------------|
| | mm | inch | ACETAL (LF) | KEVLAR (KV) | | | |
| ** 9253V01 | 85 | 3,346 | 7,75 | 7,75 | 33% | 20 | 106,85 |
| ** 9253V02 | 170 | 6,692 | | | | | |
| ** 9253V03 | 255 | 10,039 | | | | | |
| ** 9253V04 | 340 | 13,385 | | | | | |
| | | | | | | | |
| ** 9253V19 | 1615 | 63,582 | | | | | |
| ** 9253V20 | 1700 | 66,929 | | | | | |

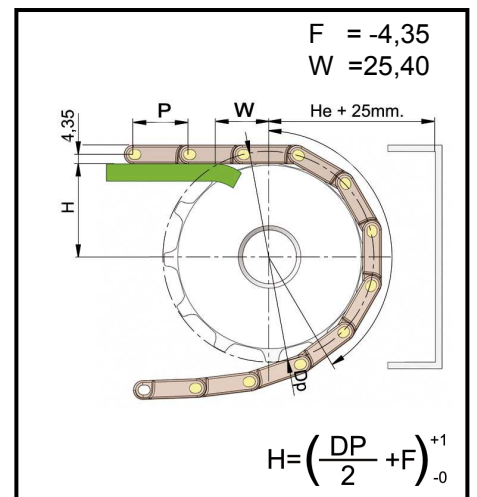


* Ri: Back-flex Radius

| ** Prefix | Chain material | Color | Ø Pin (mm) | Standard Pin Material | Minimum Temperature | Maximum Temp. | | TT N/m | FDA Approval |
|-----------|----------------|-------|------------|-----------------------|---------------------|----------------|----------------|--------|--------------|
| | | | | | | Dry enviroment | Wet enviroment | | |
| LF | Acetal-LF | Brown | 4 | PP | +5 | +85 | +70 | 20000 | ✓ |
| KV ● | Acetal-Kevlar | Grey | | | | | | | |

| Z | Ø De | Ø Dp | He |
|----|-------|--------|------|
| 12 | 97 | 98,15 | 53,4 |
| 16 | 130 | 130,2 | 69,5 |
| 18 | 146 | 146,28 | 77,5 |
| 19 | 154,5 | 154,33 | 81,5 |
| 20 | 162,5 | 162,38 | 85,5 |
| 21 | 170,5 | 170,4 | 89,6 |

Available types

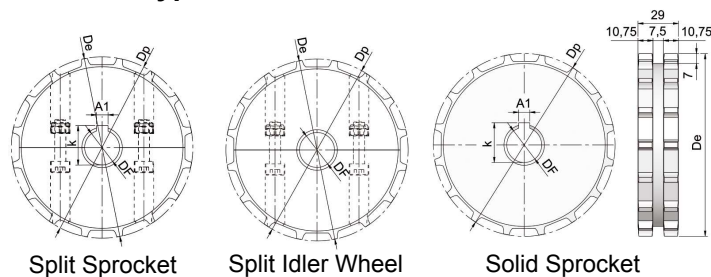

Remarks

- ● Made to order
- Other materials available under request. Made to order
- Nominal sizes & weights are according to acetal raw material, and may vary for the rest of raw materials used