


# Pre-press stations

## De-airing belt connections

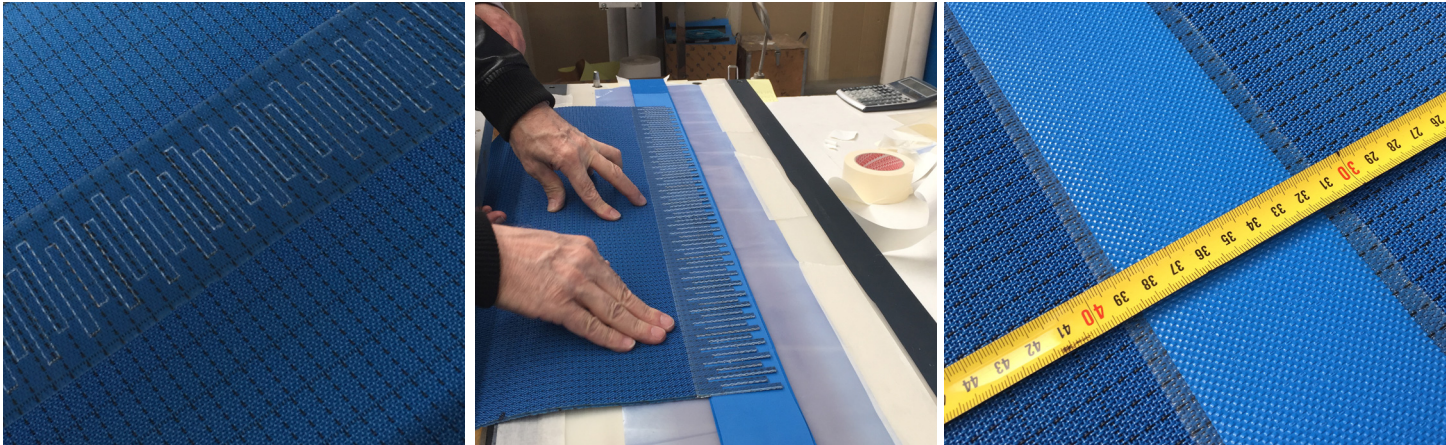

For fast, easy and efficient installation, we have a variety of different joints available.

With the connections and equipment we provide, installation can be done quickly and easily by the customer's own maintenance personnel or, alternatively, by our specialists, who are available to our customers as part of our global Ammeraal Beltech service network.

Choosing the optimal type of connection will largely depend on the type of conveyor system and on the product that the customer is producing. Our sales specialists, who have expert technical knowledge and many years of experience with such applications, will be able to help customers select the correct connection, and they will be glad to provide any other support required as well.


### De-airing at pre-press station joints

#### Splice types:

581951 Conducto 2206 24/1 0+0 I-blue AS 425cfm: 1 / 2 / 3 / 4

581952 Conducto 5090 24/1 0+0 I-blue AS 340cfm: 1 / 2 / 4


Max. production width: 5.000 mm

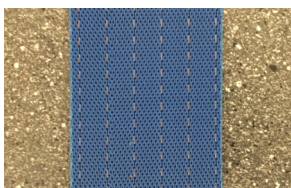


1. Endless




2. Metal

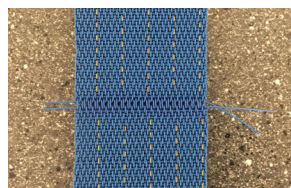

3. Double pin

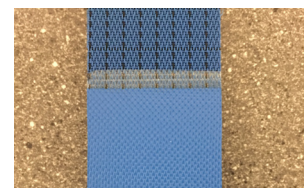


4. Finger joint




Synthetic Belts



Endless Woven Belts



Modular Belts



Engineered Belts



Homogeneous Belts



Fabrication & Service

**Expert advice and quality solutions  
for all your belting needs.**  
ammeraalbeltech.com

**Ammeraal Beltech**  
P.O. Box 38  
1700 AA Heerhugowaard  
The Netherlands

T +31 (0)72 575 1212  
info@ammeraalbeltech.com

ammerga.com

This information is subject to alteration due to continuous development. Ammeraal Beltech will not be held liable for the incorrect use of the above stated information. This information replaces previous information. All activities performed and services rendered by Ammeraal Beltech are subject to general terms and conditions of sale and delivery, as applied by its operating companies.