


Plastic Modular Belts Series Product Overview

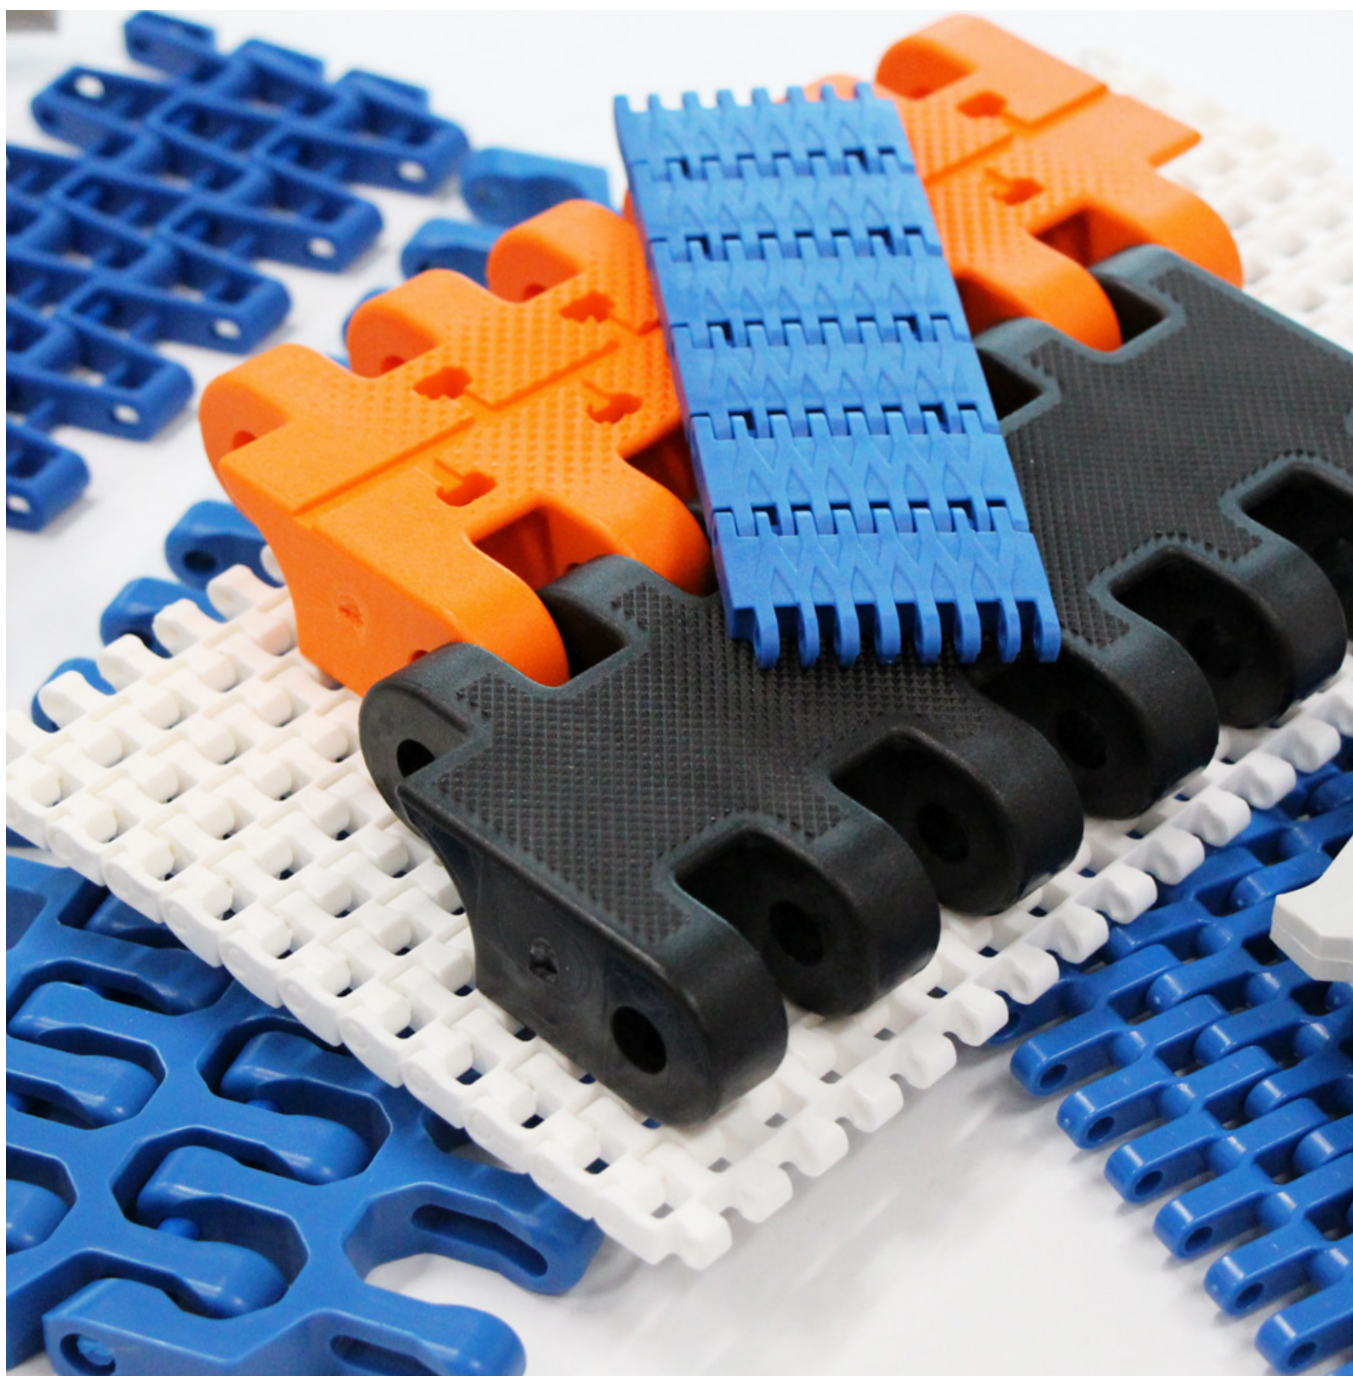

About uni

For us it is important to keep having focus on how we can do things better, smarter and more efficiently. Adaptability is important and we continuously adapt our products, processes and competences.

Ammeraal Beltech Modular (former uni-chains) is one of the world's leading manufacturers of plastic modular belts and chains for internal transport. We have a large range of products for various industries – such as Automotive, Corrugated and Food.

We are a part of the AMMEGA Group with a total of over 5,000 employees worldwide.


For more information on the AMMEGA Group visit www.ammega.com.

Ammeraal Beltech - A leading global belting company and trusted brand

Founded in 1950, Ammeraal Beltech is a global market leader in the design, manufacturing, fabrication and servicing of high-quality, high-performance process and conveyor belts, available today in 150 countries around the world.

We operate 10 manufacturing sites in Europe, the USA, Canada and Asia. We have over 28 fully owned operating companies and 150 local sales and service centres worldwide. Our network is vast, which means it's also local.

Going forward, our aim is to be the recognised leader everywhere we do business.

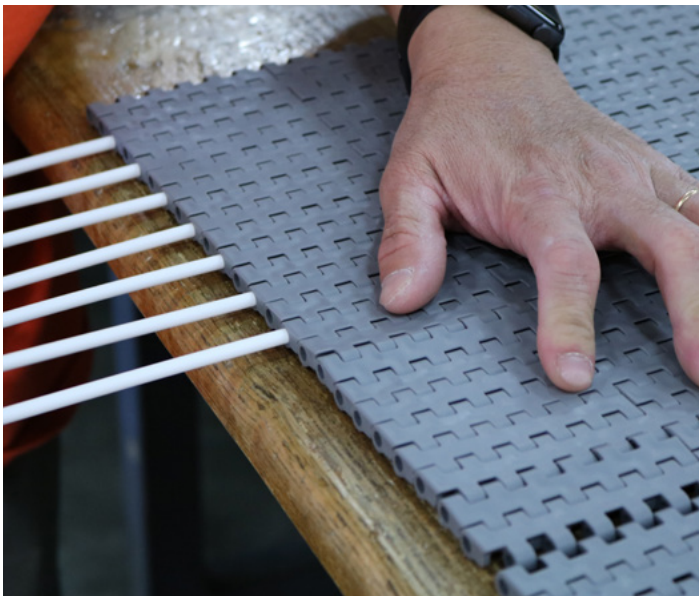

Always innovating for excellence

In every industry, improvements in production make new process solutions necessary. Working with customers and leading research institutions, Ammeraal Beltech has developed new conveying concepts that complement new systems and approaches. Within our purpose-built R&D centres, we are continuously optimising our products, meeting new challenges, such as higher operating speeds and temperatures, the need for increased cleanability and durability, and ever more stringent standards of hygiene and safety.

We create new solutions to meet new challenges.

Industries / Application



AUTOMOTIVE



BAKING



BEEF /
PORK



BEVERAGE



BREAD



CONFECTIONARY



CORRUGATED



FISH /
SEAFOOD



FRUIT &
VEGETABLE



OTHER BAKERY



PACKAGING



PASTA



POULTRY




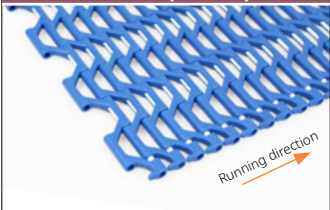















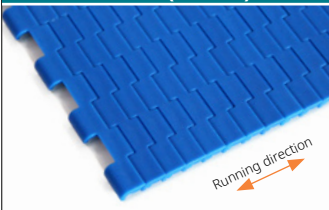








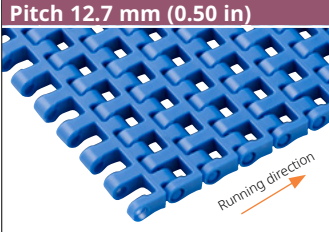




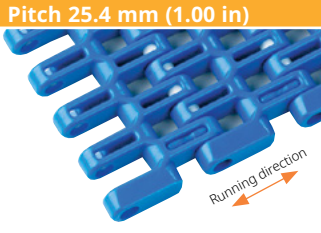


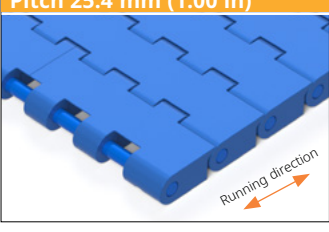








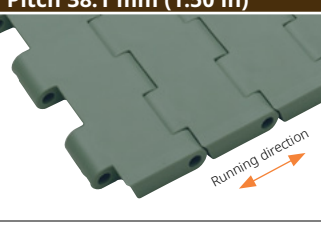




TIRE



MAN-RIDER

Straight Running Belt Overview


Pitch 8.00 mm (0.32 in)  uni NTB Strength Index (POM)  2000 N/m (137 lbf/ft) 	Pitch 12.7 mm (0.50 in)  uni M-OWL Strength Index (POM)  4500 N/m (309 lbf/ft) 	Pitch 12.7 mm (0.50 in)  uni M-QNB Strength Index (POM)  19000 N/m (1302 lbf/ft) 	Pitch 12.7 mm (0.50 in)  uni M-SNB M3 Strength Index (POM)  15000 N/m (1028 lbf/ft) 
Pitch 12.7 mm (0.50 in)  uni M-TTB Strength Index (POM)  22500 N/m (1541 lbf/ft) 	Pitch 19.1 mm (0.75 in)  uni Light Strength Index (POM)  10250 N/m (702 lbf/ft) 	Pitch 25.4 mm (1.00 in)  uni CNB Strength Index (POM)  15700 N/m (1076 lbf/ft) 	Pitch 25.4 mm (1.00 in)  uni JCB Y Strength Index (POM)  35000 N/m (2400 lbf/ft) 
Pitch 25.4 mm (1.00 in)  uni LPB Strength Index (POM)  35000 N/m (2400 lbf/ft) 	Pitch 25.4 mm (1.00 in)  uni QNB Strength Index (POM)  35000 N/m (2400 lbf/ft) 	Pitch 25.4 mm (1.00 in)  uni S-MPB Strength Index (POM)  23500 N/m (1610 lbf/ft) 	Pitch 25.4 mm (1.00 in)  uni SNB M2 Strength Index (POM)  23500 N/m (1610 lbf/ft) 
Pitch 25.4 mm (1.00 in)  uni ITB Strength Index (POM)  40000 N/m (2742 lbf/ft) 	Pitch 27.9 mm (1.10 in)  uni OWL Strength Index (POM)  12000 N/m (822 lbf/ft) 	Pitch 38.1 mm (1.50 in)  uni Light EP Strength Index (POM)  10250 N/m (703 lbf/ft) 	Pitch 38.1 mm (1.50 in)  uni SSB Strength Index (POM)  36000 N/m (2467 lbf/ft) 

Straight Running Belt Overview





uni ACB

Strength Index (POM)





uni L-SNB

Strength Index (POM)




uni OPB

Strength Index (POM)




uni BLB

Strength Index (POM)





uni CPB

Strength Index (POM)





uni CSB

Strength Index (POM)





uni UCB

Strength Index (POM)





uni MPB

Strength Index (POM)




uni DTB

Strength Index (POM)




uni RTB M1

Strength Index (POM)




uni X-MPB

Strength Index (POM)




uni XLB

Strength Index (POM)




uni AMB



Strength Index (POM)




Side Flexing Belt Overview





uni Flex ASB
Strength Index (POM)




uni Flex OSB
Strength Index (POM)





uni Flex SNB
Strength Index (POM)

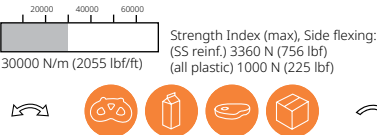

uni Flex ONE
Strength Index (POM)



uni Flex L-ASB
Strength Index (POM)



uni Flex L-OSB
Strength Index (POM)



Discover Your Local Contacts

The local partner of choice
for sustainable conveyor belting solutions
- around the globe.

General contact information:

Ammeraal Beltech

P.O. Box 38
1700 AA Heerhugowaard
The Netherlands

T +31 72 575 1212

www.ammeraalbeltech.com



Scan the QR code
and find your local
contact

