

Homogeneous Soliflex Belts Ultimate Hygienic Solutions



A Win-Win for the Food Industry: Ultimate hygiene and lower total cost of ownership


Ammeraal Beltech offers a wide range of homogeneous belts. With 75 years of experience in the Food Industry, Ammeraal Beltech knows OEM's and End Users are always looking for ways to increase food safety and productivity. That's why we developed the ultimate hygienic conveyor belt range: **Soliflex**.

Soliflex is made from a single piece of homogeneous plastic so it cannot fray and contaminate food. It is also very easy to clean (requiring less water & time).

The Soliflex range consists of 5 Positive Drive belts.

Our Soliflex Positive Drive belts come in a variety of different teeth and sprocket styles to suit your application. This positive drive system reduces the energy required to run your conveyor. Our Soliflex PRO belt delivers **Ultimate Tracking** and our Soliflex Center Bar belt delivers good tracking; they are thus virtually maintenance free!

The Soliflex range of belts can be installed on existing conveyors and in combination with proper conveyor design allows for **Cleaning and sanitizing in place**.

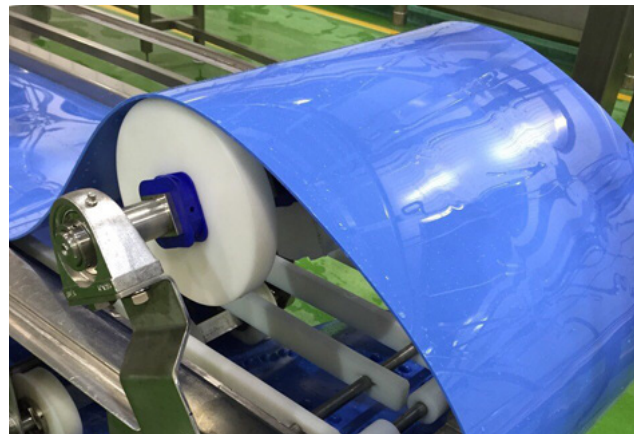

Soliflex PRO complies with Ammeraal Beltech's **SAFE & CLEAN** concept:

SAFE

- complying with international Food Grade standards (EC 1935/2004 and FDA)
- belt features that support your ISO 22000 requirements (previously HACCP)
- ultimate hygienic belt for food safety

CLEAN

- easy and fast cleaning and sanitizing of belts
- using less water, detergent and time
- cleaning and sanitizing in motion possible
- cleaning and sanitizing in place possible

Industries:

- » Meat & Poultry
- » Fish & Seafood
- » Vegetable processing
- » Bakery & Confectionary
- » Dairy






Ammeraal Beltech
member ropean
Hygienic Engineering
& Design Group



Food Grade belts comply
with EC 1935/2004
and FDA standards
supporting your
ISO 22000 requirements
(previously HACCP)

Soliflex Belt Range


There are 5 Soliflex drive systems available. Soliflex PRO, Soliflex PRO mini, Soliflex Center Bar (CB), Soliflex Full Bar (FB), Soliflex Full Bar mini (FB mini). The selection matrix assists to choose the most suitable belt for your application.

Product	Soliflex PRO	Soliflex PRO mini	Soliflex CB	Soliflex FB	Soliflex FB mini
					
Description	Hygienic tracking design	Hygienic tracking design	Hygienic design	Traditional design	Traditional design
Available materials	TPU + TPE	TPU	TPU	TPU	TPU
Shore Hardness	55 shore D	55 shore D	95 shore A	95 shore A	93 shore A
Available thickness	2, 3 and 4 mm	1.5 and 2 mm	3 mm	3.3 mm	2.79 mm
Available belt width	1800	1800	1550	1800	1800
Pitch of lugs/teeth	51.0 mm	25.5 mm	39.7 mm	50 mm	25.9 mm
Min. sprocket dia.	94.7 mm (TPU 2 mm)	47 mm	124 mm	95.5 mm	50.8 mm
Cleanability	++++	++++	++++	+	+
Transmissible torque	+++	+++	++	++	++
F/E values	+++	++	+++	++	++
Trough conveyors	+++	+++	++	+	+
Tracking	++++	++++	+++	+	+
Surface smoothness	+++	+++	++	++	++


UltraScraper

Metal detectable and antimicrobial scrapers for extended hygiene and efficient food processing.

Food items can stick even to belts with non-stick properties. Thus, scraping and cleaning efficiency and effectiveness are key Food Industry issues.

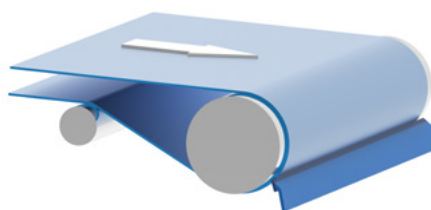

Scraper placement is possible on motordrum and sprocket driven systems.

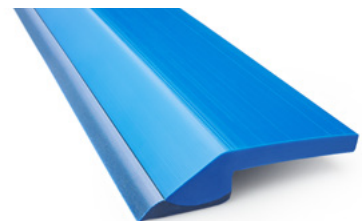

The UltraScraper's Soft Lip enables deep cleaning.

Self-tracking & customisation

The Soliflex PRO & PRO mini self-tracking system works in two ways:



1) By unique sprocket design



The sprocket's centre piece column also supports tracking and positioning. The belt is fixed in position on the drive and return pulley.



2) By using the slider bed

Slider bed strips are positioned in such a way that they act as guides for the drive lugs. In this way the belt is self-tracking over the entire slider bed.

Variable custom lug positioning on Soliflex PRO (mini) belts

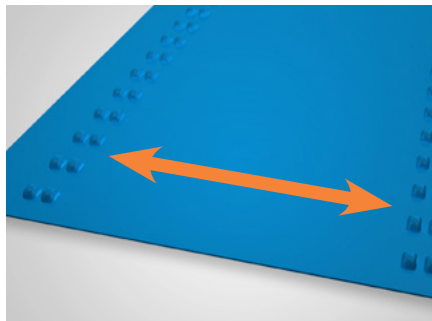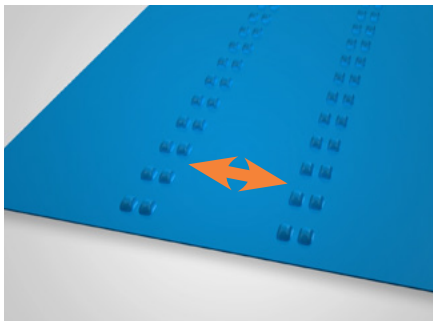

The standard configuration consists of 2 pairs of lugs (Duplex) or 4 pairs of lugs (Quattro) with a pitch of 150 mm.

A variable pitch is also available on request


For special applications such as swan necks, the lugs can be positioned on the edges of the belt allowing full control in the critical bend of the conveyor.



Fabrication capabilities

Each application and process require their own solution. For the Soliflex range of belts extensive fabrication possibilities are available to suit your needs.

Cleats

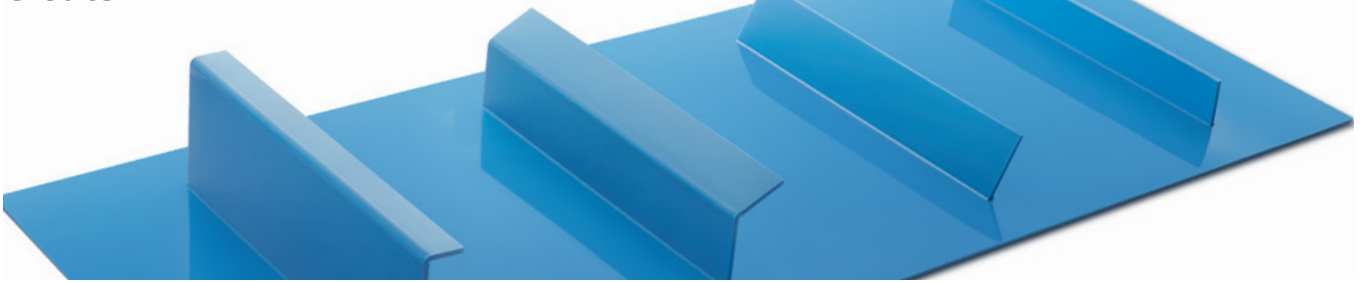


Flat, Angled, Bent all available up to 150 mm high.
Smooth finish or profiled using the R18 (positive pyramid) or A18 (inverted pyramid).
Made from TPU and using HF welding technology.

Sidewalls

Sidewalls are available for Soliflex TPU from 20-100 mm.




Can be combined with cleats to make pockets for product elevation on steep angle or vertical.

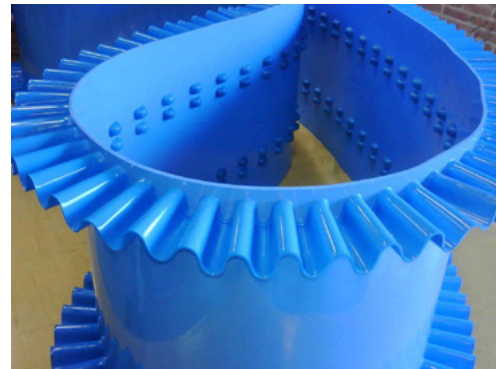

Endlessing and Joining

For ultimate hygiene an endless spliced belt is recommended. The belt can be joined in our factory or on-site using a butt splice.

Alternately, the belt can be joined using less hygienic plastic or mechanical fasteners. These solutions allow an easy removal of the belt.

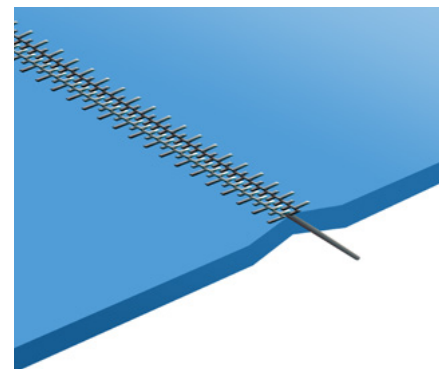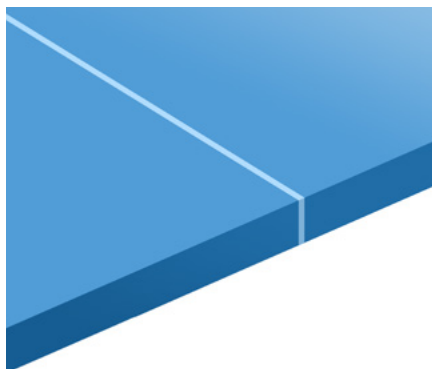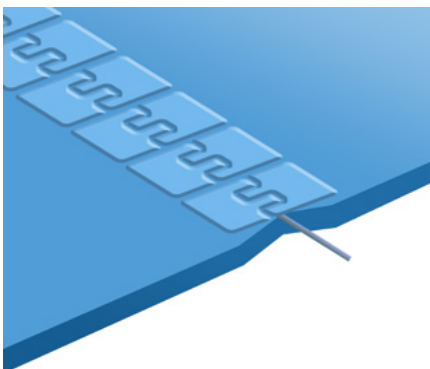

Local Contacts

... and 150 more service contact points
at ammeraalbeltech.com

Argentina

T +54 11 4218 2906
info-ar@ammeraalbeltech.com

Australia

T +61 3 8780 6000
info-au@ammeraalbeltech.com

Austria

T +43 171728 133
info-de@ammeraalbeltech.com

Belgium

T +32 2 466 03 00
info-be@ammeraalbeltech.com

Canada

T +1 905 890 1311
info-ca@ammeraalbeltech.com

Chile

T +56 2 233 12900
info-cl@ammeraalbeltech.com

China

T +86 512 8287 2709
info-cn@ammeraalbeltech.com

Colombia

T +57 893 9890
info-co@ammeraalbeltech.com

Czech Republic

T +420 567 117 211
info-cz@ammeraalbeltech.com

Denmark

T + 45 7572 3100
info-dk@ammeraalbeltech.com

Finland

T +358 207 911 400
info-fi@ammeraalbeltech.com

France

T +33 3 20 90 36 00
info-fr@ammeraalbeltech.com

Germany

T +49 4152 937-0
info-de@ammeraalbeltech.com

Hungary

T +36 30 311 6099
info-hu@ammeraalbeltech.com

India

T +91 44 265 34 244
info-in@ammeraalbeltech.com

Israel

T +972 4 6371485
info-il@ammeraalbeltech.com

Italy

T +39 051 660 60 06
info-it@ammeraalbeltech.com

Japan

T +81 52 433 7400
info-jp@ammeraalbeltech.com

Luxembourg

T +352 26 48 38 56
info-lu@ammeraalbeltech.com

Malaysia

T +60 3 806 188 49
info-my@ammeraalbeltech.com

Mexico

T +52 55 5341 8131
info-mx@ammeraalbeltech.com

Netherlands

T +31 72 57 51212
info-nl@ammeraalbeltech.com

Poland

T +48 32 44 77 179
info-pl@ammeraalbeltech.com

Portugal

T +351 22 947 94 40
info-pt@ammeraalbeltech.com

Singapore

T +65 62739767
info-sg@ammeraalbeltech.com

Slovakia

T +421 2 55648541-2
info-sk@ammeraalbeltech.com

South Korea

T +82 31 448 3613-7
info-kr@ammeraalbeltech.com

Spain

T +34 93 718 3054
info-es@ammeraalbeltech.com

Sweden

T +46 44 780 3010
info-se@ammeraalbeltech.com

Switzerland

T +41 55 2253 535
info-ch@ammeraalbeltech.com

Thailand

T +66 2 902 2604-13
info-th@ammeraalbeltech.com

Turkey

T +90 232 877 0700
info-tr@ammeraalbeltech.com

United Kingdom

T +44 1992 500550
info-uk@ammeraalbeltech.com


United States

T +1 847 673 6720
info-us@ammeraalbeltech.com


Vietnam

T +84 8 376 562 05
info-vn@ammeraalbeltech.com


**Expert advice, quality solutions
and local service
for all your belting needs**



Synthetic Belts




Engineered Belts



Endless Woven Belts



Homogeneous Belts



Modular Belts



Fabrication & Service

General contact information:

Ammeraal Beltech
P.O. Box 38
1700 AA Heerhugowaard
The Netherlands

T +31 (0)72 575 1212
info@ammeraalbeltech.com

ammega.com