


uni CSB





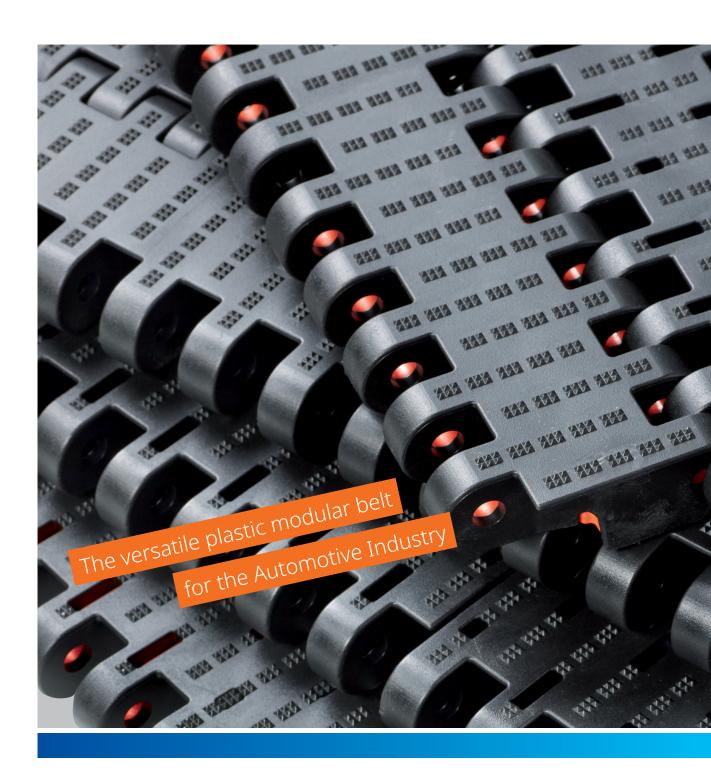

Introducing a new innovative product: uni CSB

Ammeraal Beltech is globally recognized as the leading company for plastic modular belt conveying in the automotive industry.

After more than 10 years of success in the industry, Ammeraal Beltech recognized a customer need for even more out of a plastic modular belt:

- · Lower energy consumption
- Longer conveyor lengths and less transfers
- Higher load capacity
- Lower construction heights (less pit depth)
- Electrically conductive without compromising belt pull
- Flame retardant without compromising belt pull
- · Good ergonomics and worker safety

The result of these customer's wishes is our new uni CSB. uni CSB is specially designed with and for the automotive industry, "heavy load" conveying and people moving industry.

This approach has resulted in a two unique belt features:

- 2 inch pitch belt rated at 100.000 N/m comparable to exisiting 2.5 inch and 3 inch pitch belts.
- Use of Dual Compount Technology (DCT) resulting in the world's first plastic "real modular" modular link.

Dual Compound Technology provides the uni CSB with a high versatility. This versatility allows for a combination of different materials within one conveyor belt to meet customer demands without compromising any of the belts remarkable features such as high allowable belt pull.

uni CSB: The 2 inch pitch modular belt that can do what all other 2.5 inch pitch and 3 inch pitch belts can do... and more!



Ammeraal Beltech Modular uni CSB

Stronger belts at lower costs

- 2 inch pitch means low construction heights and less pit depth required.
- Lower belt weight allows for a higher load, a longer center to center distance and less transfers.
- Lower belt weight results in less needed drive power, smaller drive motors and smaller gearboxes.
- Electrically conductive properties are added to the belt through cost efficient inserts without compromising belt pull as usual.
- The belt can be executed in a combination of B1* fire rating and electrically conductive properties.

Lower total cost of ownership

- Long belt life due to high contact area and innovative belt bottom design.
- Less bottom wear at high surface pressure due to wear-resistant wheelplate inserts.
- · Longer conveyors and higher loads on one conveyor.
- Low maintenance costs due to extremely low maintenance requirement.
- · Lower belt weight results in lower energy consumption.

Safe Walk

- · Appropriate grip in dry and wet conditions.
- Low belt profile to avoid injuries and foot discomfort.
- · Colored edges to visualize moving floors.

Base link open + electrical conductive insert = EC link







Base link closed + WP wear part insert = Wheel Plate





Dual Compound Technology (DCT):

Combining the best properties of two materials in one belt link

^{*}B1: Fire rated material (Flammability Class B1)



Local Contacts

... and 150 more service contact points at ammeraalbeltech.com

Argentina

T +54 11 4218 2906 info-ar@ammeraalbeltech.com

Australia

T+61 3 8780 6000 info-au@ammeraalbeltech.com

Austria

T +43 171728 133 info-de@ammeraalbeltech.com

Belgium

T +32 2 466 03 00 info-be@ammeraalbeltech.com

Canada

T +1 905 890 1311 info-ca@ammeraalbeltech.com

Chile

T +56 2 233 12900 info-cl@ammeraalbeltech.com

T +86 512 8287 2709 info-cn@ammeraalbeltech.com

Colombia

T +57 1 893 9890 info-co@ammeraalbeltech.com

Czech Republic

T +420 567 117 211 info-cz@ammeraalbeltech.com

Denmark

T + 45 7572 3100 info-dk@ammeraalbeltech.com

Finland

T +358 207 911 400 info-fi@ammeraalbeltech.com

France

T +33 3 20 90 36 00 info-fr@ammeraalbeltech.com

Germany

T +49 4152 937-0 info-de@ammeraalbeltech.com

Hungary T +36 30 311 6099 info-hu@ammeraalbeltech.com

T +91 44 265 34 244 info-in@ammeraalbeltech.com

Israel

T +972 4 6371485 info-il@ammeraalbeltech.com

T+39 051 660 60 06 info-it@ammeraalbeltech.com

Japan

T +81 52 433 7400 info-jp@ammeraalbeltech.com

Luxembourg

T +352 26 48 38 56 info-lu@ammeraalbeltech.com

Malaysia

T +60 3 806 188 49 info-my@ammeraalbeltech.com

T +52 55 5341 8131 info-mx@ammeraalbeltech.com

Netherlands

T +31 72 57 51212 info-nl@ammeraalbeltech.com

T+51 1 713 0069 info-pe@ammeraalbeltech.com

Poland

T +48 32 44 77 179 info-pl@ammeraalbeltech.com

Portugal

T +351 22 947 94 40 info-pt@ammeraalbeltech.com

Singapore

T +65 62739767 info-sg@ammeraalbeltech.com

Slovakia

T+421 255648542 info-sk@ammeraalbeltech.com

South Korea

T +82 31 448 3613-7 info-kr@ammeraalbeltech.com

T+34 93 718 3054 info-es@ammeraalbeltech.com

Sweden

T +46 (0) 10 130 96 00 info-se@ammeraalbeltech.com

Switzerland

T +41 55 2253 535 info-ch@ammeraalbeltech.com

Thailand

T +66 2 902 2604-13 info-th@ammeraalbeltech.com

T +90 232 877 0700 info-tr@ammeraalbeltech.com

United Kingdom

T +44 1992 500550 info-uk@ammeraalbeltech.com

United States

T+1 847 673 6720 info-us@ammeraalbeltech.com

Vietnam

T +84 8 376 562 05 info-vn@ammeraalbeltech.com

Expert advice, quality solutions and local service for all your belting needs













General contact information:

Ammeraal Beltech

P.O. Box 38 1700 AA Heerhugowaard The Netherlands

T +31 (0)72 575 1212 info@ammeraalbeltech.com

ammega.com