

ZipLink® is a breakthrough in belting design that combines cover materials with a structured link mesh that can be easily spliced at any length into a continuous belt without the need for special tools, presses or other equipment.

The ZipLink® construction eliminates points of weakness because there is no loss of strength in the splice area, making the belts stronger so they last longer than belts of other seamed or fused materials.

ZipLink® provides long life and flexibility for multiple applications. The belts can easily and quickly be changed without accruing significant downtime or expensive overtime. After converting to ZipLink®, time and personnel required to change belts may be reduced by more than half.



Complete toolbox available, including instruction CD

Working instruction



Score the back and lubricate the pin.



Pop the pin out at 1.5 cm from the edge.



Gently pull the pin out using pliers.



Carefully cut the top cover.




Press the ends back together firmly.



Pass the wire through and cut the excess.

US Sales and Service Locations

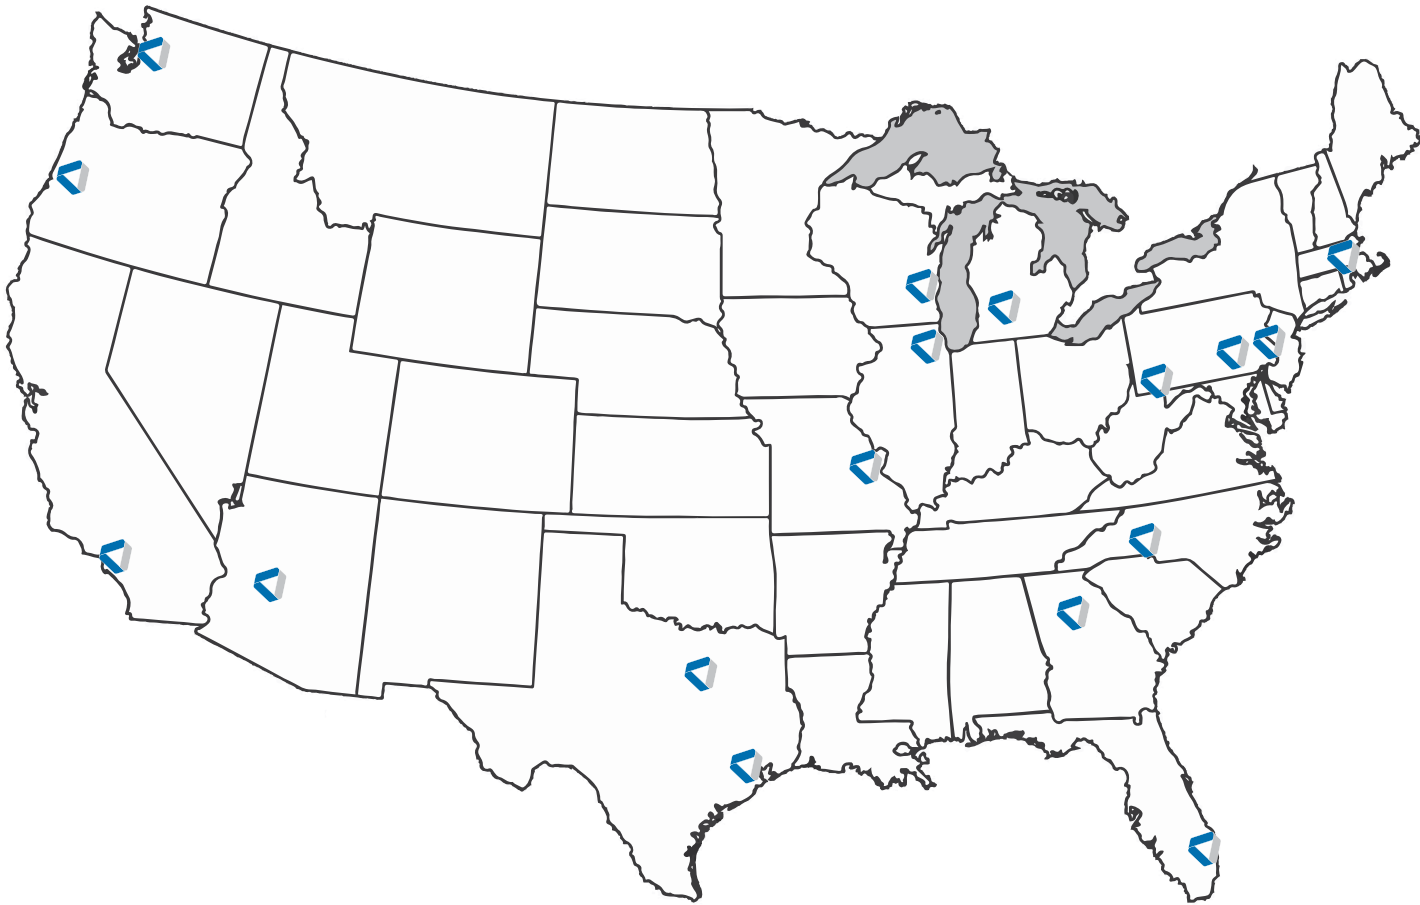

SYNTHETIC

Ammeraal Beltech North America
7501 N. St. Louis Avenue
Skokie, IL 60076

T +1 847 673 6720
F +1 847 673 6373
TF +1 800 323 4170

info-us@ammeraalbeltech.com
www.ammeraalbeltech.com

MODULAR

Ammeraal Beltech North America
500 Brentwood Drive
Reading, PA 19611

T +1 610 372 1800
F +1 610 372 3590
TF +1 800 937 2864


info-us@ammeraalbeltech.com
www.ammeraalbeltech.com

SPECIALTIES

Ammeraal Beltech North America
112 Nardis Drive
Jefferson, PA 15344

T +1 847 673 6720
F +1 847 673 6373
TF +1 800 323 4170

info-us@ammeraalbeltech.com
www.ammeraalbeltech.com

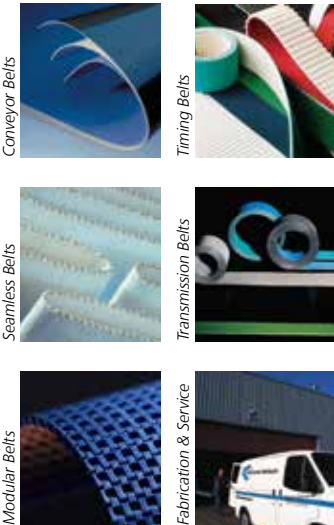

Expert advice, quality solutions and local service for all your belting needs

NA



ZipLink® Belts

Win Your Race at the Pit Stop!

... and 150 more service contact points at www.ammeraalbeltech.com

Date: 01.2018



www.ammeraalbeltech.com

ZipLink®– Increase your production time



Ammeraal Beltech is a leading manufacturer of process and conveyor belting with an established reputation for developing innovative solutions for belting applications.

Working closely with OEMs and end users Ammeraal Beltech has developed a range of ZipLink® Belts: a special design link fabric in combination with top covers giving superior performance. Main benefit is the striking increase of your production time.



ZipLink® Belts:

- Minimize replacement time on site by 75%
- Eliminate splice failures
- Eliminate damages to transported products
- Eliminate damages to machine parts (drums, slider beds) due to mechanical fasteners



Joint with one single pin!

ZipLink®, ideal for whatever application where belt replacement time is an issue, for example:

- » **Cardboard industry**
bridge raising and bridge, slitting, cross cutting, box folding, stacking, delivery
- » **Wood processing**
grinding, sanding, polishing, braking, sawing, painting, pre-compressing
- » **Tire industry**
uncured rubber transport, general process and handling
- » **Airports & logistics**
scanning, check in, collectors, inclined transport, airplane loading
- » **Tobacco processing**
conditioning, weighing, transport
- » **Magnetic conveyors**
- » **Food applications**



Belts that join instantly Easy, no specific training required

AMMERAAL BELTECH ZIPLINK® BELT RANGE	» Shortest production downtime » Reduced maintenance time and cost » Extended belt service life » Ideal for difficult locations					Increased production time	
	» Protects both product and conveyor from being damaged » Extra high stability allows for easier tracking » Safe on-site installation, no heavy equipment needed » No loss of strength in the joint area					Operational safety	
	» Low friction bottom version helps reduce energy consumption due to the absence of splice areas					Less energy consumption	
	» Strongest in-house splicing; no outside fitters required » No need for any special tools or presses » Possible repair of damaged belt sections					Economical use	
	» Choice of top cover materials tuned to the application » ZipLink® Belts have a proven track record worldwide					Proven technology	

ZipLink® is an innovative belt range which is specially designed to offer benefits in a variety of different industries. Quick and simple installation or repair help to lower costs and reduce downtime. The design allows for repair or replacement of just small sections of the belt.



The largest range of covers ... and we can make your specific belt on demand

Selection of Range ZipLink® Belts												
Article no.	Nomenclature					Thickness [mm]	Hardness top cover [shore]	Min. pulley dia. flexing [mm]	Min. pulley dia. back flexing [mm]	Temperature min. [°F]	Temperature max. [°F]	
514927	Elastoflex	EZP	10/1	0 + A19	beige / 50 Sh	9.0	50A	100	120	5	176	
560165	Fabric	EZP	10/1	01 + 0	black	3.6	–	64	100	40	250	
583040	Fabric	EZP/C	10/2	0 + 0	white FG	3.9	–	80	80	5	194	
583010	Flexam	EZP	10/1	0 + 10	black M2 FR	3.5	80A	50	80	5	176	
583050	Flexam	EZP	10/1	0 + A20	black FR	8.4	65A	100	150	5	176	
583055	Flexam	EZP	10/1	0 + A66	black FR	8.8	65A	100	150	5	176	
583056	Felt	EZP	10/1	0 + FE	black	4.3	–	100	150	50	212	
560124	Nitrile	EZP	10/1	01 + C57	white FG	4.0	60A	75	100	-0.4	250	
560119	Nitrile	EZP	10/1	01 + 08	white CR FG HR	3.4	60A	75	100	-0.4	250	
560121	Nitrile	EZP	10/1	01 + C37	brown	6.3	50A	75	125	-0.4	250	
560141	Nitrile BX	EZP	10/1	0 + 05	blue FG	3.4	75A	50	50	-0.4	250	
560136	Nitrile BX	EZP	10/1	0 + C37 (NI)	blue	6.2	70A	75	120	-0.4	250	
560120	Nitrile BX	EZP	10/1	01 + 05	blue	2.6	70A	50	75	-0.4	250	
560110	Nitrile BX	EZP	10/1	01 + C37 (NI)	blue	6.3	70A	75	120	-0.4	250	
583020	Nonex	EZP	10/1	0 + 10	white FG	3.5	65A	50	80	5	176	
560122	NR	EZP	10/1	01 + 32	red	5.1	40A	100	125	40	250	
560111	NR	EZP	10/1	01 + C37	natural CR	6.3	40A	75	100	40	250	
560116	NR	EZP	10/1	01 + C52	tan CR	7.2	45A	100	175	40	250	
560162	Silam	EZP	10/1	01 + 05	white CR HD FG HR OR	2.3	–	76	152	-76	392	
560173	Silam	EZP	10/1	01 + 03	red CR HD HR OR	5.3	–	101	101	40	349	
560191	Teflon	EZP	10/1	0 + 01	grey FG HR	3.4	–	75	–	-0.4	302	
514615	Pletex	EZP	10/1	0 + 30	red	6.0	35A	60	80	5	176	
560127	SBR	EZP	10/1	0 + C37	black	5.3	45A	75	100	40	250	
560129	SBR	EZP	10/1	01 + C37	black CR	6.3	45A	75	110	40	250	

CR = cold resistant, FG = foodgrade, FR = flame retardant, HR = heat resistant, HD = hydrolysis resistant, OR = oil resistant

CR = cold resistant, FG = foodgrade, FR = flame retardant, HR = heat resistant, HD = hydrolysis resistant, OR = oil resistant

Easy replacement of the complete belt or of small sections in the event of damage.



Achieve considerable cost savings: easy to use tooling kit and no specialized outside fitters required.