

# Ultrasync F2 T10 Ropanyl green NTB

Article code: UCFA002520

## General information

<b>Product group</b>	Ultrasync
<b>Industry segment</b>	General industry; Tyre
<b>Main product feature</b>	Positive drive, Low friction tooth side, Low friction top side

## Belt construction

<b>Tension layer</b>		polyester
<b>Number of plies</b>		1
<b>Top side</b>	<b>material</b>	NTB fabric, Polyamide
	<b>finish</b>	bare fabric
	<b>color</b>	green
<b>Bottom side</b>	<b>material</b>	Polyamide, Polyamide
	<b>finish</b>	bare fabric, T10
	<b>color</b>	green


## Characteristics

<b>Food Grade (FG)</b>	no
<b>Oil &amp; Fat resistance</b>	yes
<b>Antistatic (AS)</b>	no
<b>ATEX approval</b>	no

## Technical data

<b>Tooth</b>	profile		T10	
<b>Belt tension at maximum allowable elongation</b>			1 N/mm	5.71 lbs/in.
<b>Thickness</b>		belt	4.6 mm	0.18 in.
		top cover	0.7 mm	0.03 in.
<b>Weight</b>			3.3 kg/m <sup>2</sup>	0.68 lbs/ft <sup>2</sup>
<b>Coefficient of friction</b>	tooth side against steel	dynamic	0,3	
		static	0,3	
<b>Operating temperature</b>	continuous	from / to	-10 / 90 °C	14 / 194 °F
<b>Minimum pulley diameter</b>	flexing		36 mm	1.42 in.
	backflexing		40 mm	1.57 in.
<b>Belt width</b>	maximum		1000 mm	39.37 in.

## Reference images

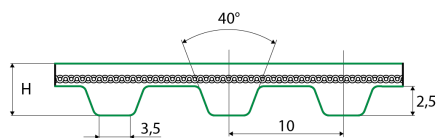

## Fabrication

This information on the fabrication options is general, please contact Ammeraal Beltech to inquire for the specific fabrication possibilities of the belt of your choice.

Open end, prepared splice, spliced endless with mechanical fastener or a pin joint fastener.

Cleats welded or mechanically attached, metal teeth, guides welded or glued.

Covers can be welded, glued, coated or vulkanized onto the back side of the timing belt.

Thermoplastic covers can be embossed.

Perforations, lateral and longitudinal slots, lateral and longitudinal profiles.

### Additional information

This sheet contains typical values, which apply to a temperature of approx. 20 °C (68 °F), unless otherwise stated, individual data may differ.

The T10 tooth profile is according to ISO 17396.

**Standard**