


Special Plastic Chain

Series **uni NH78** Type -

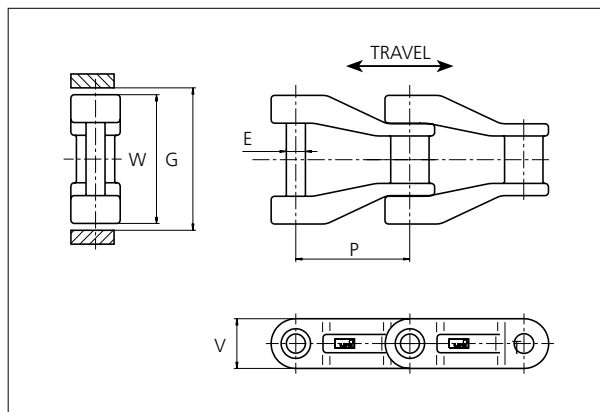

Special Plastic Chain

Straight running chain
 Pitch: 66.3 mm (2.61 in)
 Backflex radius: 75.0 mm (3.00 in)
 Permissible tensile strength:
 T1: 9000 N (2023 lbf)
 T2: 7000 N (1574 lbf)
 T3: 6000 N (1349 lbf)
 T4: 6000 N (1349 lbf)
 T5: 5000 N (1124 lbf)

Standard shipping lengths:
 boxes of 92 links
 = 6.100 m (20.0 ft)

E		G		P		V	
mm	in	mm	in	mm	in	mm	in
11.0	0.43	78.0	3.07	66.3	2.61	28.6	1.13

All dimensions are for chains in POM material.

Standard material & colors

Width (W)			Material & color	Pin material	Pin fixing	Pin ø		Weight	
	mm	in				mm	in	kg/m	lb/ft
uni NH78 T1	74.0	2.91	POM-LF	SS431 SS304	Staked	11.0	0.43	2.1	1.41
			POM-D						

Non Standard material & colors

Width (W)			Material & color	Pin material	Pin fixing	Pin ø		Weight	
	mm	in				mm	in	kg/m	lb/ft
uni NH78 T2	74.0	2.91	PBT-GR PA6-GF	SS431 SS304	Staked	11.0	0.43	2.1	1.41
uni NH78 T3	74.0	2.91	PA6-GF	SS431 SS304	Staked (PE sleeve)	10.0	0.39	2.1	1.41
uni NH78 T5	74.0	2.91	PP-AR	SS431 SS304	Staked	11.0	0.43	2.1	1.41

STANDARD

STRAIGHT RUNNING



PITCH 66.3 MM/2.61 IN

Sprocket

No. of teeth	Pitch diameter		Overall-diameter		Min. ø bore		Max. ø bore		Hub-diameter		A-dimension		B-dimension		 Machined PA6
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	
Z6	132.6	5.22	137.4	5.40	20.0	0.80	40.0	1.60	65.0	2.60	43.1	1.70	80.6	3.20	✓
Z8	173.3	6.82	182.6	7.20	20.0	0.80	40.0	1.60	65.0	2.60	65.8	2.60	100.9	4.00	✓
Z10	214.5	8.44	226.6	8.90	20.0	0.80	50.0	2.00	73.5	2.90	87.7	3.50	121.6	4.80	✓

Machined sprocket

Non standard material and color:
See uni Material and Color Overview.

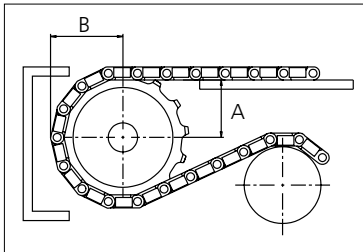

Please ensure that sufficient size shaft and keyway are chosen for corresponding load.

Other sprocket sizes are available upon request
Width of tooth: 15.8 mm/0.62 in
Width of sprocket: 42.3 mm/1.67 in
uni Retainer Rings: See uni Retainer Ring data sheet

uni NH78 / 20260112



The local partner of choice for
sustainable conveyor belting solutions
– around the globe.

<http://eptool.online>

Member of Ammerge Group.



Scan the QR code
and find your local
contact

Ammergeal Beltech Modular
Hjulemagervej 21
DK-7100 Vejle
T +45 7572 3100

<http://eptool.online>

This information is subject to alteration due to continuous development. Ammergeal Beltech will not be held liable for the incorrect use of the above stated information. This information replaces previous information. All activities performed and services rendered by Ammergeal Beltech are subject to general terms and conditions of sale and delivery, as applied by its operating companies.